

78522

ShieldECO 800 Tilt

FEATURES



- 5 years (2 years + 3 years) extended warranty
- Constructed from steel & acrylic
- Satin nickel & clear acrylic finish
- Complete with integrated control gear
- Fire rated to 30, 60 & 90 minutes
- 20 degree tilt

SPEC DATA

| | |
|----------------------------|------------------|
| LED module wattage: | 8.5W |
| Product wattage: | 8.5W |
| Product Lumen: | 750 |
| Kelvin: | 3000K |
| Energy Rating: | A+ |
| Dimmable: | Yes |
| Beam Angle: | 60° |
| Power Factor: | 0.9 |
| CRI: | 80 |
| Lifetime (Hours): | 30000 |
| LED Type: | SMD |
| SDCM: | <6 |
| Product Voltage: | 220-240V |
| IP Rating: | IP20 |
| Cut out: | D70mm |
| Operating Temp: | -20 to 40 Degree |
| Product Weight (KG): | 0.248 |
| Minimum Cavity Depth (mm): | 90mm |
| Terminal Block: | 4-way Quick fit |
| Class: | 2 |

ACCESSORIES

75021, Dimmer Module 150W

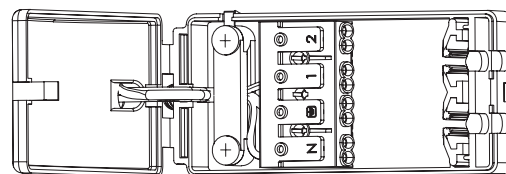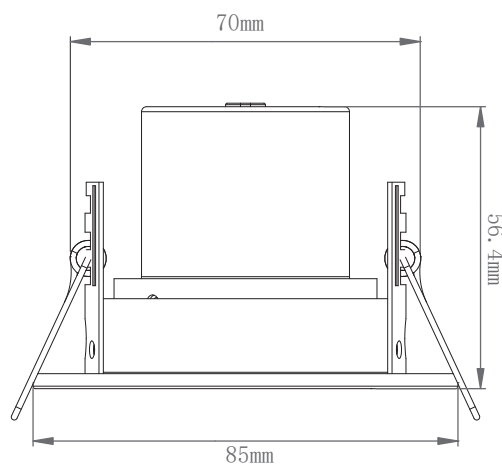

Quick fit