


Constant Voltage 24V LED Driver

Features:

- Independent compact design
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II
- Non-Dimmable

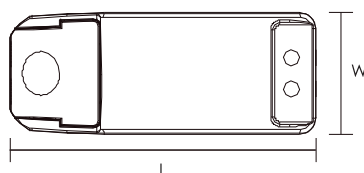

Parameters:

Model No.	Input voltage (V)	Max. output (W)	Output voltage (V)	Output current (A)	Min. Load (W)	Power factor (λ)	Efficiency full load (%)	No-load power (W)	Ambient temperature ta (°C)	Max. casing temperature tc (°C)	Isolation	Dimensions LxWxH (mm)	Weight (g)
79682	220-240	20	24	0-0.83	0	0.80	83	<0.3	-20...+50	80	SELV	113x44x28	100
79328	220-240	40	24	0-1.7	0	0.95	86	<0.5	-20...+50	85	SELV	166x52x24	140
79329	220-240	75	24	0-0.31	0	0.95	89	<0.5	-20...+50	85	SELV	184x61x32	270
79681	220-240	150	24	0-6.25	0	0.95	91	<0.5	-20...+45	85	SELV	210x67x34	320