


# FLSMD SITE FLOODS

## MULTI-VOLTAGE

FLSMD is a range of tough and robust floodlights designed for site applications. Featuring a multi-voltage supply driver, FLSMD can be used in virtually any project.

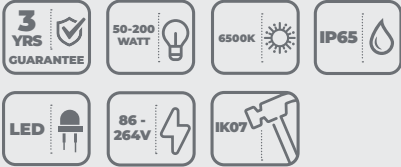

### Features


- Symmetrical 120° distribution
- Convenient multi-voltage drivers
- Tough die-cast construction
- Pre-wired with 1m cable



### Specification

<b>Material:</b>	Body: Die-Cast Aluminium Lens: Tempered Glass
<b>Colour Temperature:</b>	6500K
<b>Colour Finish:</b>	Yellow
<b>CRI</b>	Ra70
<b>LED Lifetime:</b>	35,000 Hours
<b>Beam Angle:</b>	120° Symmetrical
<b>IP Rating:</b>	IP65
<b>IK Rating:</b>	IK07
<b>Working Temperature:</b>	-20°C to 40°C
<b>Power Factor</b>	0,9
<b>Electrical Class:</b>	Class I
<b>Guarantee:</b>	3 Years

### Dimensions

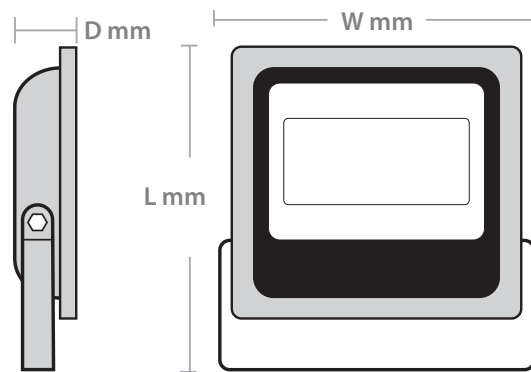

Product Code	Dimensions
FLSMD50Y-1	L: 310mm, W: 310mm, D: 65mm
FLSMD100Y-1	L: 330mm, W: 320mm, D: 90mm
FLSMD150Y-1	L: 365mm, W: 370mm, D: 94mm
FLSMD200Y-1	L: 425mm, W: 410mm, D: 110mm

Product Code	Description	Wattage	Lumen Output	Efficacy	Net Weight	Barcodes
FLSMD50Y-1	FLSMD Site Floodlight	50W	4000 lm	80 lm/W	2.24	5055807618564
FLSMD100Y-1	FLSMD Site Floodlight	100W	8000 lm	80 lm/W	3.64	5055807620116
FLSMD150Y-1	FLSMD Site Floodlight	150W	12000 lm	80 lm/W	4.8	5055807620123
FLSMD200Y-1	FLSMD Site Floodlight	200W	16000 lm	80 lm/W	7.6	5055807620130



FLSMD50Y-1



FLSMD100Y-1





FLSMD150Y-1



FLSMD200Y-1

Light Distribution Curve

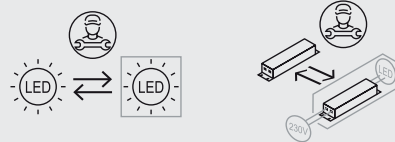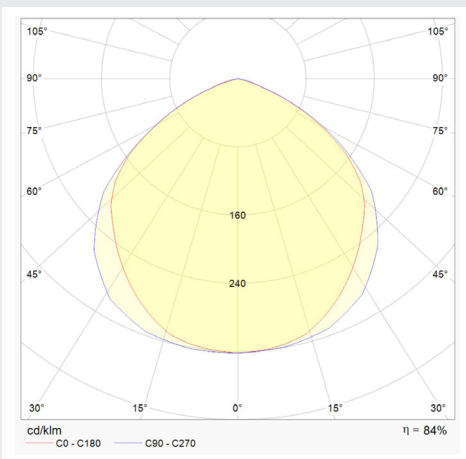

[www.redarrowelectrical.co.uk](http://www.redarrowelectrical.co.uk)