



# UPLIGHT

## WORKSPACE LIGHTING



This innovative 110V Uplight features a high lumen output and 360° light distribution, making it an efficient solution for site lighting.

### Features


- High light output, ideal for large spaces
- Emergency version, switchable to prevent discharge during storage
- Aux socket for interlinking or power tools
- Convenient carry strap



### Specification

|                                |  |
|--------------------------------|--|
| <b>Material:</b>               | ABS + Polycarbonate                              |
| <b>Colour Temperature:</b>     | 6500K  |
| <b>Colour Finish:</b>          | Yellow   |
| <b>CRI</b>                     | Ra>80  |
| <b>LED Lifetime:</b>           | L70B50 35,000 Hrs                                |
| <b>IP Rating:</b>              | IP54   |
| <b>IK Rating:</b>              | IK07   |
| <b>Working Temperature:</b>    | -20°C to 40°C<br>(Emergency version 0°C to 40°C) |
| <b>Power Factor</b>            | >0.9   |
| <b>Electrical Class:</b>       | Class I  |
| <b>Emergency Battery Type:</b> | Ni-Cd  |
| <b>Guarantee:</b>              | 2 Years  |



### Dimensions

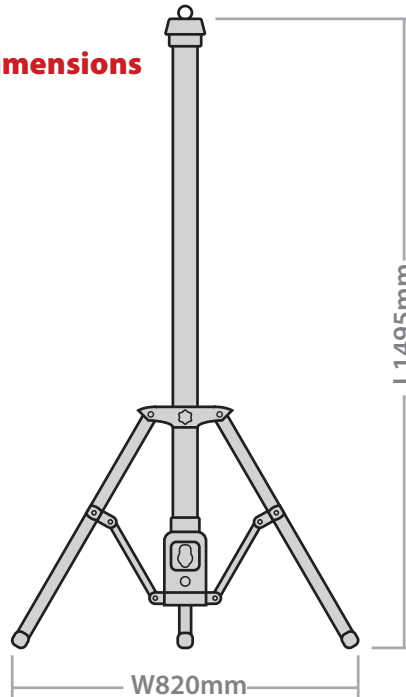

| Product Code | Description                                       | Wattage | Lumen output | Emergency Lumen Output | Efficacy | Net Weight | Barcodes      |
|--------------|---|---------|--------------|------------------------|----------|------------|---------------|
| ULS72YPW     | Uplight with 3m cable + 16A plug/socket           | 72W     | 7200 lm      | -                      | 100 lm/W | 3.16       | 5055807620482 |
| ULE72YPW     | Uplight Emergency with 3m cable + 16A plug/socket | 72W     | 7200 lm      | 350 lm                 | 100 lm/W | 3.34       | 5055807620475 |



Light Distribution Curve

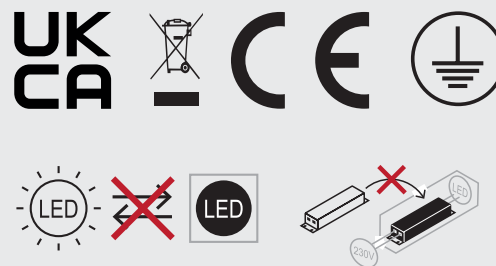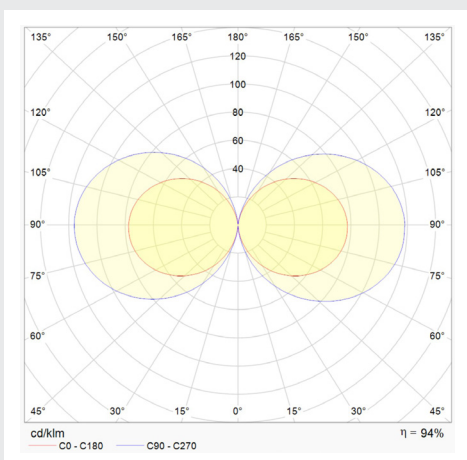

[www.redarrowelectrical.co.uk](http://www.redarrowelectrical.co.uk)