


## LED Slimline Floodlights

Slimline LED floodlight with adjustable wall mounting bracket. Energy saving, ideal for both residential and commercial external applications.

- Latest long-life SMD LED technology
- DOB AC Driver
- Black die cast aluminium housing, toughened glass cover
- Corrosion resistant fixing bolts and cable gland
- Pre-fitted cable: 600mm
- Beam spread: 110°
- IP Rating: IP65
- Colour temperature: 5000k
- Colour rendering index: Ra>70
- Rated Life: 20,000 hours
- Operating temperature: -20°C to +40°C
- Input: 220-240V AC ~ 50/60Hz

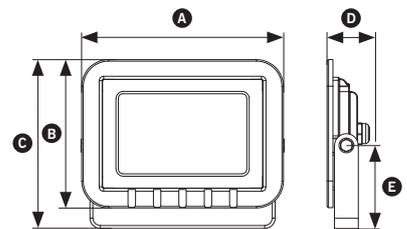

**2 YEAR**  
WARRANTY

**LED**

**IP65**

Part No.	Description	Wattage	Measurement	Lumen Output	IP Rating	Colour Temperature
			A x B x C x D x E			
LXSFL10WB	LED Slimline Floodlight 110°	10W	100 x 80 x 98 x 27 x 50mm	800Lm	IP65	5000K
LXSFL20WB	LED Slimline Floodlight 110°	20W	135 x 100 x 112 x 29 x 52mm	1600Lm	IP65	5000K
LXSFL30WB	LED Slimline Floodlight 110°	30W	160 x 135 x 160 x 31 x 77mm	2400Lm	IP65	5000K
LXSFL50WB	LED Slimline Floodlight 110°	50W	205 x 165 x 195 x 33 x 95mm	4000Lm	IP65	5000K



Email [sales@luxna.co.uk](mailto:sales@luxna.co.uk)



Web [luxna-lighting.com](http://luxna-lighting.com)