



Consumer

40A 2 Pole 30mA AC Type RCD, Type A

Specification

Part No: ERS2P40A30A


- Device can be locked safely in the 'ON' or 'OFF' position using a device lock
- Maximum torque setting: 2.5Nm
- 35mm DIN rail mounting
- CE & SEMKO Certified
- BS EN61008-1 / EN61008-2-1



Technical Specification

Specification	
Rated Current	40A
Poles	2P
Rated Voltage	230 AC
Rated Frequency	50/60Hz
Rated Making and Breaking Capacity	500A
Rated Conditional Residual Short-Circuit Current	10kA
Electro-Mechanical Endurance	4000 Cycles
Protection Class	IP20
Connection Capacity	Rigid Conductor 25mm ²
Connection Terminal	Pillar Terminal with Clamp

Wiring Diagram

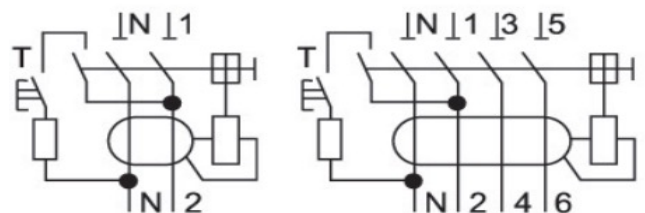

YESSS House, Unit B Foxbridge Way, Normanton, WF6 1TN
AER, Zac du Caillou, Rue Jules Verne, 69630, Chaponost, France

eris-eu.com sales@eris-eu.com