

DATA SHEET

STERLING

Sterling UGR<19 LED Panel 600x600 TPA
Rated 840


IP44 TP(a) Slim Recessed LED Panel
PMMA Light Guide Plate with MP Polycarbonate
Diffuser
ENEC Flicker Free Driver



mymesh



GENERAL INFORMATION	
Product Code	NST/UGR19/66/840
Product Range	Sterling
Product Category	LED Panels
Fixing Method	Recessed/Surface/Suspended
IP Rating	44
IK Rating	N/A
Warranty	5 Years Unlimited Hours
DIMENSION/WEIGHT	
Dimensions (L x W x H) (mm)	L=undefined, W=595, H=9
Cut-out Size (mm)	N/A
Product Weight (Kg)	2.45
CONSTRUCTION	
Body Material	PC
Body Colour	White
Optical Material	PC
Optical Finish	Micro-prismatic
Termination	3x2x2.5mm sq. Push In Terminal
Driver - Integral or Remote	Remote
PACKAGING	
Carton Dimensions (mm)	N/A
Quantity per Outer Carton	N/A
Total Weight incl. Carton (Kg)	N/A

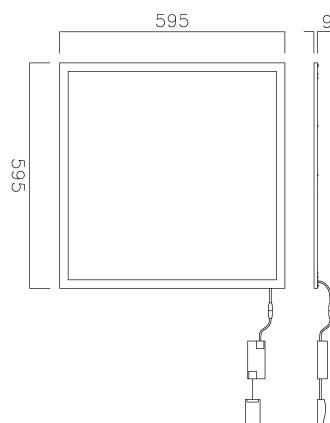

LUMINAIRE PERFORMANCE	
Energy Rating	N/A
Luminaire Lumens (lm)	3460
Power Consumption (W)	28
Efficacy (l.lm/c.W)	120
Operating Temp. (Min/Max)	-20°C - 25 °C
LIGHT SOURCE	
Type	LED
Correlated Colour Temp.	4000
Colour Rendering Index (CRI)	>80
Lumen Depreciation	L80:B10 50000
SDCM	<3
ELECTRICAL INPUT	
Voltage (V)	220-240V AC
Operating Frequency	50
In Rush	<25A
Drivers per MCB*	B10=16 B16=28
Class	Class 2
Power Factor	>0.95
Cable Entry	Prewired
ELECTRICAL OUTPUT	
Forward Current (mA)	N/A
Forward Voltage (Vf)	N/A
EMERGENCY DATA	
Mode of Operation	N/A
Battery Duration	N/A
Battery Type	N/A
Battery Specification	N/A
Ballast Lumen Factor (BLF)	N/A
DIMMING	
DALI	N/A
OTHER	N/A
Switch Dim	N/A
Corridor Function	N/A
SENSORS	
Microwave	N/A
PIR	N/A
STANDARDS/APPROVALS	
CE Marked	yes
Certificate of Conformity	yes
Accreditations	N/A
BARCODE	
EAN Number	5055943065628

* GUIDE ONLY

