



Commercial

32A 4 Pole Metal Isolator Switch


Specifications

- Maximum load: 32 / AC22A
- No. of poles: 4
- Rating: AC22A switching of mixed resistive loads and inductive loads
- Voltage: 415V
- Standard: BS EN 60947-3
- IP Rating: IPX0, unit must only be installed in a clean and dry environment
- Max cable size: 25mm²
- Finish: Epoxy powder coated to RAL7035
- Dimensions(mm): 145x110x55
- Knockouts: 2x20mm top and bottom, 2x20mm each side
- Main switch terminals: 2.5Nm




Part No:	Amps
ERSMS324	32

Wiring Diagram

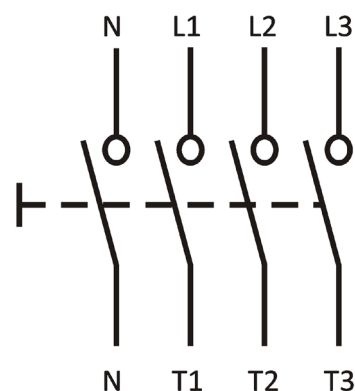

Overall & Installation Dimensions

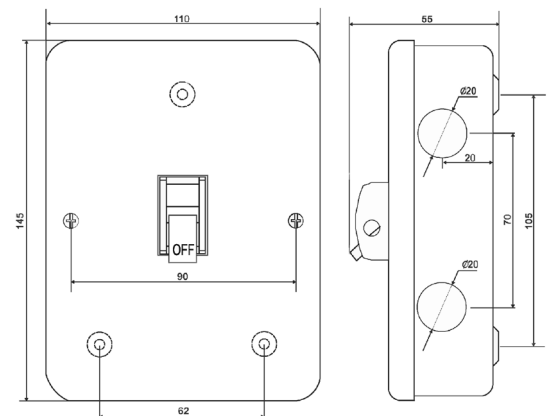

Padlockable in "OFF" position only.

AER, Zac du Caillou, Rue Jules Verne, 69630 Chaponost, France

eris-eu.com sales@eris-eu.com