

Part code NEWCAV3/M

<b>Standards</b>	<b>BS4343</b>	<b>IEC309 IP44 Rated Units</b>
------------------	---------------	--------------------------------

<b>Voltage</b>	<b>240V</b>	<b>17th Edition caravan hook up unit</b> <b>1 x IP65 Enclosure</b> <b>1 x Mains Switch</b> <b>3 x RCBO 16a 30ma Dp</b> <b>3 x IP44 16A 2P+E Outlet blue 240v</b> <b>3 x KWH meter 45A</b>
<b>Amps</b>	<b>16A</b>	
<b>IP Rating</b>	<b>44</b>	
<b>Pin</b>	<b>2P+E</b>	
<b>Voltage Range</b>	<b>240v</b>	
<b>Type</b>	<b>17th Edition Caravan Hook Up</b>	
<b>H Location</b>	<b>6H</b>	



DP B Type 30mA

CPRO-32/2B



A single phase 45 Amp 1 module DIN rail mounted meter. Featuring a 5+2 LCD display and MID approval. This meter comes with a pulse output as standard.


**IP44** a prueba de salpicaduras

- With screw terminals
- Housing material: PA6/ABS
- Contacts: Nickel-plated contacts
- Mechanical Interlocked

**Dimensiones y conexiones / Dimensions & connections**



4 IEC Interlocked Horizontal IP44/IP67

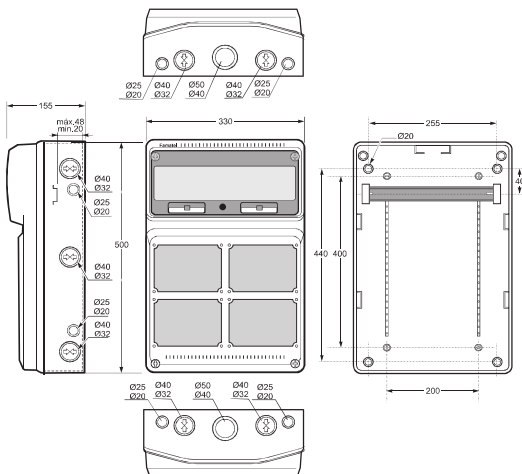


Dimensiones / Dimensions	
Altura / Height	500
Ancho / Width	330
Profundidad / Deep	155

Entradas / Entries	
Superior / Top	2 x Ø40-Ø32 + 2 x Ø25-Ø20 + 1 x Ø50-Ø40
Inferior / Bottom	2 x Ø40-Ø32 + 2 x Ø25-Ø20 + 1 x Ø50-Ø40
Lado / Side	3 x Ø40 - Ø32 + 2 x Ø25 - Ø20

**Enlazable / Linkable**  
**Norma / Norm: EN62208**

- After plugging and switching-on the plug is locked.
- After switching-off and unplugging switch is locked.

At switch ON or OFF position, its possible to be , Lockable by padlock



**Certificaciones / Certifications**

Normativa aplicada / Applied Standards

IEC/CEI/EN 60309-1, IEC/CEI/EN 60309-2