

Part code **NEWCAV4/M**

Standards	BS4343	IEC309 IP44 Rated Units
------------------	---------------	--------------------------------

Voltage	240V	17th Edition caravan hook up unit 1 x IP65 Enclosure 1 x Mains Switch 4 x RCBO 16a 30ma Dp 4 x IP44 16A 2P+E Outlet blue 240v 4 x KWH meter 45A
Amps	16A	
IP Rating	44	
Pin	2P+E	
Voltage Range	240v	
Type	17th Edition Caravan Hook Up	
H Location	6H	

DP B Type 30mA

CPRO-32/2B



Generic Image

A single phase 45 Amp 1 module DIN rail mounted meter. Featuring a 5+2 LCD display and MID approval. This meter comes with a pulse output as standard.

IP44 a prueba de salpicaduras


- With screw terminals
- Housing material: PA6/ABS
- Contacts: Nickel-plated contacts
- Mechanical Interlocked



Dimensiones y conexiones / Dimensions & connections



4 IEC Interlocked Horizontal IP44/IP67

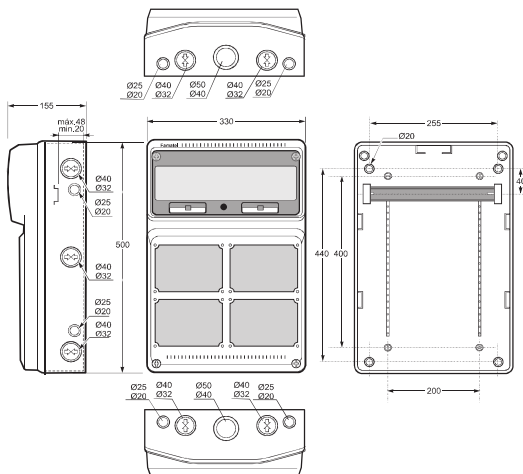


Dimensiones / Dimensions	
Altura / Height	500
Ancho / Width	330
Profundidad / Deep	155

Entradas / Entries	
Superior / Top	2 x Ø40-Ø32 + 2 x Ø25-Ø20 + 1 x Ø50-Ø40
Inferior / Bottom	2 x Ø40-Ø32 + 2 x Ø25-Ø20 + 1 x Ø50-Ø40
Lado / Side	3 x Ø40 - Ø32 + 2 x Ø25 - Ø20

Enlazable / Linkable
Norma / Norm: EN62208

- After plugging and switching-on the plug is locked.
- After switching-off and unplugging switch is locked.

At switch ON or OFF position, its possible to be , Lockable by padlock



Certificaciones / Certifications

Normativa aplicada / Applied Standards

IEC/CEI/EN 60309-1, IEC/CEI/EN 60309-2