


# Serie ACQUA - Envolvente de superficie

## ACQUA range - Surface mounting enclosure

### Ref: 3904-TTBY

**Dimensiones y características constructivas / Dimensions and constructional features**

**Envolvente de superficie IP65, 4 módulos /**  
Surface mounting enclosure IP65, 4 modules

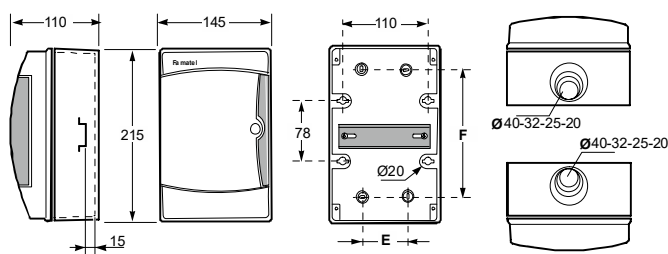

**Dimensiones máximas / Maximum dimensions (mm)**

<b>Alto / Height</b>	215
<b>Ancho / Wide</b>	145
<b>Profundidad / Depth</b>	110

**Dimensiones interiores / Inner dimensions (mm)**

<b>Alto / Height</b>	210
<b>Ancho / Wide</b>	140
<b>Profundidad / Depth</b>	60

<b>Modules / Modules</b>	4
--------------------------	---

<b>Entradas / Inlets</b>	2 x Ø20, Ø25, Ø32, Ø40
--------------------------	------------------------

<b>Componentes incorporados / Built-in components</b>	Carril DIN / DIN-Rail 35mm Tapones tornillos / <b>Screw caps</b>
---	---

Ref. / Item	Configuración / Configuration
<b>3904-TTB</b>	1 x SPTC-4



SPTC-4

**Configuración / Configuration**

<b>Color / Colour</b>	Gris / <b>Grey</b> (RAL 7035)
<b>Instalación / installation</b>	Superficie <b>Surface mounting</b>
<b>Clase de aislamiento / Insulation class</b>	II (Aislamiento Total / <b>Total insulation</b> )
<b>Ángulo de apertura / Opening angle</b>	100°
<b>Precintable / Sealable</b>	Si / <b>Yes</b>
<b>Herramienta recomendada / Recommended Tool</b>	Destornillador/ <b>Screwdriver</b> Plano (0,8 Nm)
<b>Utilización / Use</b>	Exterior e interior (Grado contaminación III) / <b>Outdoor and indoor location</b> (Pollution Degree III)
<b>Configuraciones / Configurations</b>	3904-TB: 1xSPTC-4

• Neutral and earth terminal bar support for item 3904, 3904-T and Acqua Combi serie + 2 terminal bar RG-04 (2x16 mm<sup>2</sup> + 4x10 mm<sup>2</sup>).

## ENVOLVENTES SUPERFICIE IP65 / SURFACE MOUNTING ENCLOSURE IP65

## Características técnicas / Technical data

<b>Tensión de aislamiento /</b> Rated insulaton voltage	1000 V ac	<b>Condiciones ambientales de funcionamiento/</b> Ambient operating conditions	-25 °C/40°C (70°C Max. Temp. interna/Max. internal Temp.) 50% HR (40°C) / 90% HR (25°C)
<b>Intensidad asignada /</b> Rated current	63 A	<b>Transporte y almacenaje /</b> Transport & storage	-25°C/ 70°C
<b>Intensidad cortocircuito /</b> Rated current	10 kA	<b>Resistencia al impacto /</b> Impact resistance	IK08 (IEC/EN 62262)
<b>Potencia disipable /</b> Thermal power dissipation capability	8 W	<b>Grado de protección /</b> Protection degree	IP65 (IEC/EN 60529)
<b>Frecuencia /</b> Frequency	50 / 60 Hz, dc	<b>Ensayo hilo incandescente /</b> Glow wire test	650°C (IEC/EN 60695-2-10)
<b>Resistencia de aislamiento /</b> Insulation resistance	>5MΩ@500Vdc	<b>Ensayo de bola /</b> Ball pressure test	70°C (IEC / EN 60695-10-2)
<b>Rigidez dieléctrica /</b> Dielectric strength	3,75 kV	<b>Materiales /</b> Materials	ABS, Puerta en PC, Materiales libres de halogenos <b>ABS, Door in PC,</b> <b>Halogen free materials</b>
<b>Tensión de impulso /</b> Impulse withstand voltage	4 kV		

## Normativa / Regulations

<b>Normativa aplicada /</b> Applied Standards	IEC 62208; IEC 61439-1 + IEC 61439-3 (Apartados aplicables / Applicable clauses) Low Voltage Directive 2014/35/UE, REBT 2002
--	---

## Información Logística y Embalaje/ Logistics and packaging information

**Cantidad mínima de pedido: 1 envoltorio /** Minimun quantity order: 1 enclosure

**Código arancelario /** Tariff code: HS 85381000

<b>Embalaje /</b> Packaging	<b>Cantidad /</b> Quantity	<b>Peso neto – Peso bruto/</b> Net weight – Gross weight	<b>Dimensiones (mm)/</b> Dimensions (mm)	<b>Codigo EAN /</b> EAN code
Retrãctil individual / <i>Single shrink wrp</i>	1 u.	580,7 gr - 585 gr	215 x 145 x 110 mm	8429760220961
Caja / <i>Carton</i>	17	9871,9 gr - 10592 gr	580 x 390 x 400 mm	8429760230960

## Instrucciones / Instructions

<b>Uso /</b> Use	<ul style="list-style-type: none"> <li><input type="checkbox"/> Las operaciones de instalación, puesta en servicio, inspección y mantenimiento sólo podrán ser realizadas por personal adecuadamente cualificado y formado en temas eléctricos y de seguridad aplicables. El cumplimiento de las instrucciones de seguridad no excusa el cumplimiento de otras normas específicas de la instalación, el lugar, el país u otras circunstancias que afecten al cuadro (R.D.614/2001, REBT, etc...).</li> </ul> <p><i>Installation, commissioning, inspection and maintenance operations can only be carried out by suitably qualified personnel trained in applicable electrical and safety issues. Compliance with the safety instructions does not excuse compliance with other regulations specific to the installation, the place, the country or other circumstances that affect the table (R.D.614 / 2001, REBT, etc ...).</i></p> <ul style="list-style-type: none"> <li><input type="checkbox"/> No se debe instalar el equipo sobre una superficie de material inflamable, ni en ambientes que pudieran estar bajo influencia de productos agresivamente corrosivos.</li> </ul> <p><i>Do not install the equipment on a surface of flammable material, or in environments that may be under the influence of aggressively corrosive products.</i></p>
<b>Mantenimiento /</b> Maintenance	<ul style="list-style-type: none"> <li><input type="checkbox"/> Realizar inspecciones visuales periódicas de la envoltorio. Se deben buscar grietas, golpes, etc., que puedan afectar al funcionamiento normal del cuadro y al grado IP designado.</li> </ul> <p><i>Perform periodic visual inspections of the enclosure. Look for cracks, bumps, etc., that may affect the normal operation of the enclosure and the designated IP degree.</i></p>