


LED Panel 600 30W Backlit

- Offers exceptional running cost and maintenance savings when replacing traditional fluorescent luminaires
- Excellent Luminaire efficacy up to 100 Lumen/Watt
- Recessed mounted, suitable for use in 15 or 24mm standard exposed grid ceilings
- Non dimmable, flicker free remote driver included
- Construction material: Steel housing and backplate, aluminium frame, white finish
- Optic: High transmission opal diffuser, TP(b) fire rating
- Driver input: Pre-wired 15cm cable
- Correlated colour temperature: 4000K or 6000K
- Colour rendering index: Ra80
- Rated life L70 B50 (Ta25°): 50,000 hours
- Operating temperature: -10°C to 40°C
- Voltage and Frequency rating: 220-240V AC ~ 50/60 Hz
- Options available:
 - Dimmable driver: 1-10V, DALI or Push Dim
 - Maintained Emergency 3-hour remote pack
 - Surface mounting box kit
 - Suspension mounting cable kit





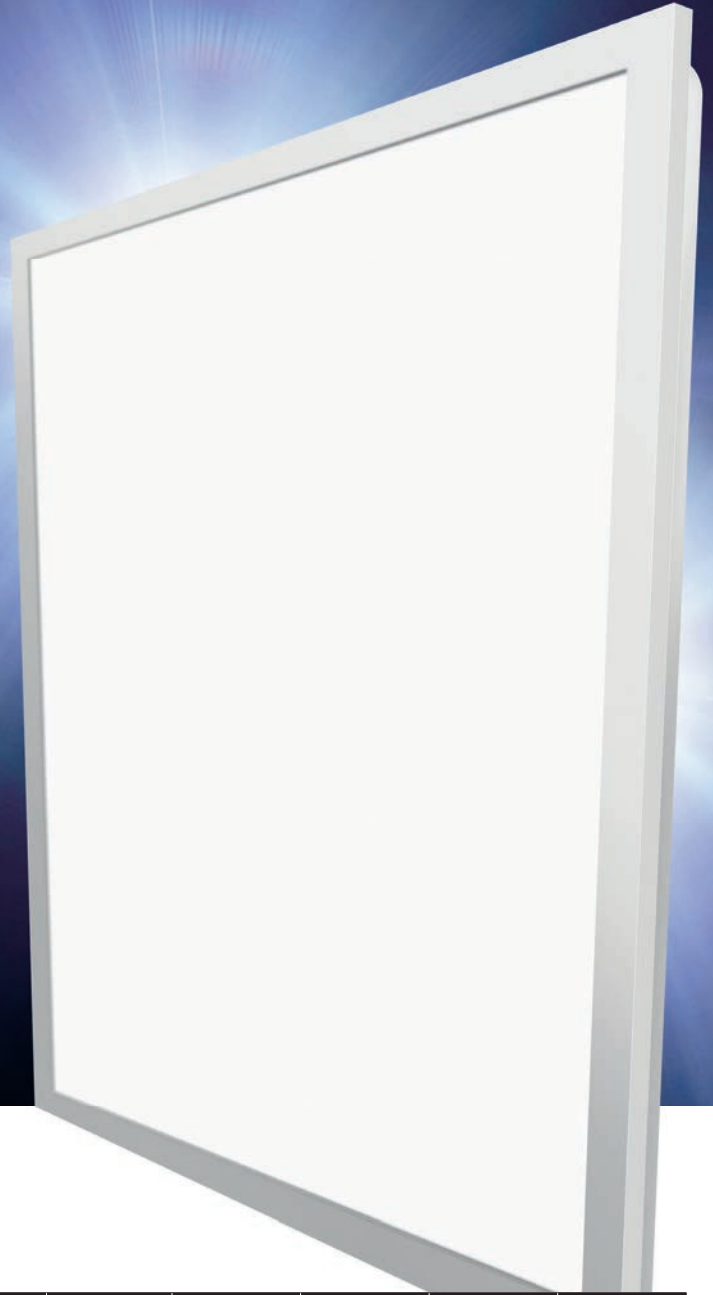


Part No.	Description	Measurement L x W x H	Wattage	Lumen Output	TP Fire Rating	IP Rating	Colour Temperature
Panel							
LXPANB30LED66NW	LED Recessed Panel Backlit 600	595 x 595 x 34mm	30W	3000Lm	TP(b)	IP20	4000K
LXPANB30LED66CW	LED Recessed Panel Backlit 600	595 x 595 x 34mm	30W	3000Lm	TP(b)	IP20	6000K
Accessories							
LXPANB66SMBK	Surface Mount Box Kit	600 x 600 x 72mm	4 panel surface mounting frame white				
LXPANB66SCK	Suspension Cable Kit	1200mm max.	Adjustable wire suspension cables with surface fixings				
LXLPF2-60-EM3	Remote 3hr Emergency Pack	320 x 88 x 42mm	3W Emergency conversion pack with charge indicator				



Email sales@luxna.co.uk



Web luxna-lighting.com