


## LED Panel 600 28W Backlit

- Offers exceptional running cost and maintenance savings when replacing traditional fluorescent luminaires
- Excellent Luminaire efficacy up to 110 Lumen/Watt
- Recessed mounted, suitable for use in 15 or 24mm standard exposed grid ceilings
- Non dimmable, flicker free remote driver included
- Construction material: Steel housing and backplate, aluminium frame, white finish
- Optic: High transmission microprism diffuser, TP(a) fire rating
- Driver input: Pre-wired 15cm cable
- Visual comfort: Low glare UGR<19
- Correlated colour temperature: 4000K or 6000K
- Colour rendering index: Ra80
- Rated life L70 B50 (Ta25°): 50,000 hours
- Operating temperature: -10°C to 40°C
- Voltage and Frequency rating: 220-240V AC ~ 50/60 Hz
- Options available:
  - Dimmable driver: 1-10V, DALI or Push Dim
  - Maintained Emergency 3-hour remote pack
  - Surface mounting box kit
  - Suspension mounting cable kit

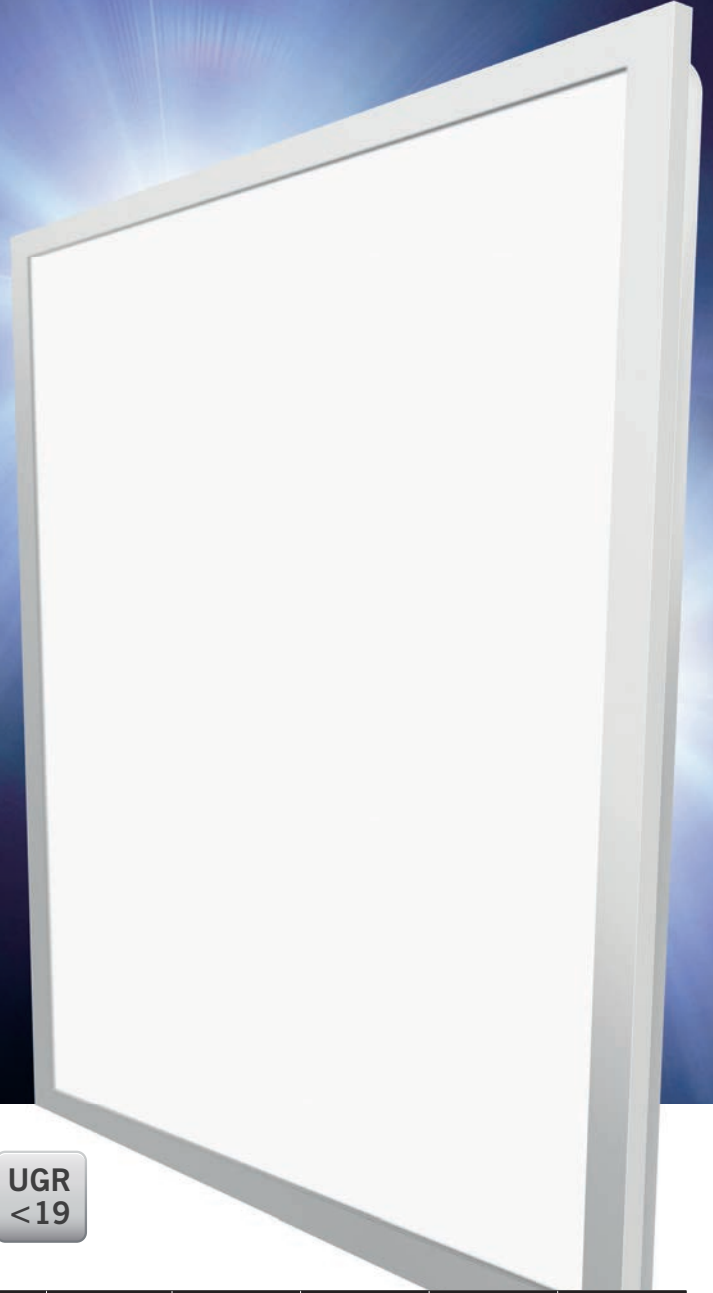

5 YEAR WARRANTY
LED
IP20
TP(a)
UGR <19

Part No.	Description	Measurement L x W x H	Wattage	Lumen Output	TP Fire Rating	IP Rating	Colour Temperature
<b>Panel</b>							
LXPANB28LED66NW/A/19	LED Recessed Panel Backlit 600	595 x 595 x 34mm	28W	3100Lm	TP(a)	IP20	4000K
LXPANB28LED66CW/A/19	LED Recessed Panel Backlit 600	595 x 595 x 34mm	28W	3100Lm	TP(a)	IP20	6000K
<b>Accessories</b>							
LXPANB66SMBK	Surface Mount Box Kit	600 x 600 x 72mm	4 panel surface mounting frame white				
LXPANB66SCK	Suspension Cable Kit	1200mm max.	Adjustable wire suspension cables with surface fixings				
LXLPF2-60-EM3	Remote 3hr Emergency Pack	320 x 88 x 42mm	3W Emergency conversion pack with charge indicator				



Email [sales@luxna.co.uk](mailto:sales@luxna.co.uk)



Web [luxna-lighting.com](http://luxna-lighting.com)