

# **INCEPTOR® SLATE**

## **Technical Specification**





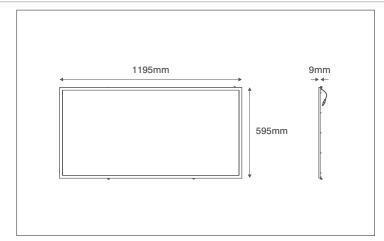


#### **General Information**

Dimensions	1195mm (L) x 595mm (W) x 9mm (D)	
Materials	Frame: Powdercoated Aluminium	
	Diffuser: Polycarbonate	
	Light Guide Plate (LGP): PMMA	
Finish	White (RAL 9003)	
Product Weight	5.1Kg	
Dimmable	No	
Ingress Protection	IP44	
Flammability Rating	TP(a)	
Warranty	5 Years	

Δ	CC	00	20	ric	2

OVEMCG50	3 Hour Emergency Pack
OVCGMF0002	240V~ 38-69W Multi-function Dimmable Constant Current
	LED Driver
OVSURF733	1200mm x 600mm Surface Frame Kit
OVSUSP733	Suspension Wire Kit



#### **Supply & Power**

Input Voltage & Frequency	220-240V~ 50/60Hz
Electrical Safety	Class II (Double Insulated)
Circuit Wattage	50W
Input Current	221mA
In-rush Current	14A (580µs)
Power Factor	>0.9
Ambient Temperature (Ta)	-20°C - +40°C
Critical Temperature	+75°C
LED Driver	Remote Driver Supplied
Prewired Flow™ Connector	Yes (3 Pole CT105-F Push-fit Terminals)

### **Luminaire Output**

Colour Temperature	4000K
CRI	>80
Typical Luminous Flux	5250lm
Efficacy	105lm/W
Beam Angle	90°
Unified Glare Rating (UGR)	<19
LED Lifetime (L70)	60,000 Hours
Flicker Free	Yes

#### **Additional Information**

Suspension hooks pre-fitted to the back













**T:** +44 (0)1827 300640

E: sales@oviaUK.com | W: oviaUK.com