

General Information

Dimensions (mm)	150 (L) x 29 (W) x 30 (D)
Materials	Downlight: Polycarbonate
Finish	White, Black & Silver
Product Weight (Kg)	0.3
Cutout Diameter (mm)	35
Recess Depth (mm)	30
Ingress Protection	IP20
Warranty (Years)	4

Supply & Power Information

Input Voltage & Frequency (V~ / Hz)	220-240 50/60
Safety Class	II
Circuit Wattage (W)	3
Operation Mode	Non-maintained Only
Operating Temperature (°C)	0 to +40
Maximum Critical Temperature (°C)	+70

Luminaire Output

Colour Temperature (K)	5500
Beam Angle (°)	120
LED Lifetime (L70) (Hours)	30000

Emergency Backup Information

Emergency Luminous Flux (lm)	130
Battery Specification	3.6V 1800mAh Ni-Cd Battery - Serial
Minimum Duration (Hours)	3


Compatible Accessories

OVEMB3618NCS - 3.6V 1800mAh Ni-Cd Battery - Serial

Open Areas

Mounting Height	Axial/Wall	Axial/Axial	Transverse/Axial	Transverse/Transverse	Transverse/Wall
2.0m	2.5	5	5	5	2.5
2.5m	2.7	5.4	5.4	5.4	2.7
3.0m	2.8	5.5	5.5	5.5	2.8

Illuminance values based on a maintenance factor of 0.8

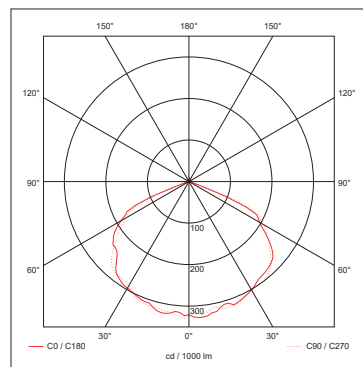

Emergency (DC)

