


# niGLON™

## Circuit Protection

# Combined RCD & MCB (RCBO)

## C Curve Single Pole

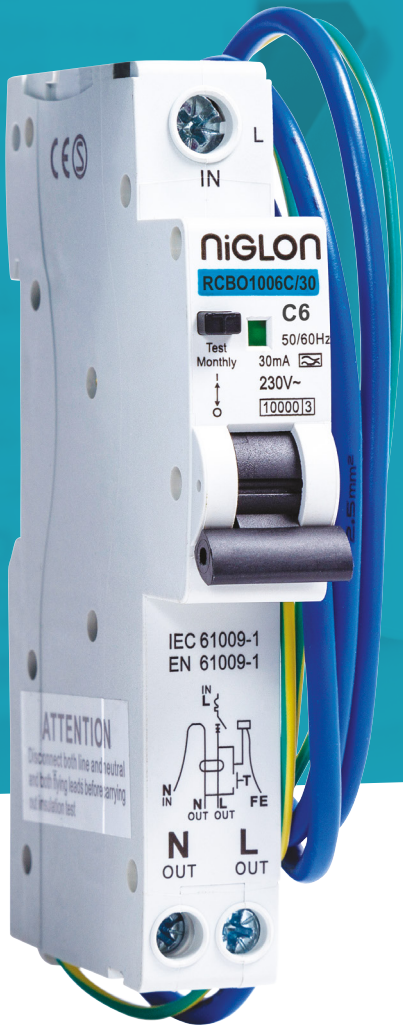

The Range	
List No	Rated current
RCBO1006C/30	6A
RCBO1010C/30	10A
RCBO1016C/30	16A
RCBO1020C/30	20A
RCBO1025C/30	25A
RCBO1032C/30	32A
RCBO1040C/30	40A
RCBO1050C/30	50A

Technical Specifications	
Max Rating	230V
RCD Type	A
Tripping Curve	Type C
Breaking Capacity	10kA
Rated tripping current	30mA
Cable Capacity	25mm <sup>2</sup> line in 10mm <sup>2</sup> live out/neutral out
Standards	BS EN 61009-1 intertek
Dimensions (WxHxD)	18 x 113.5x 66mm

### Technical Drawing

