
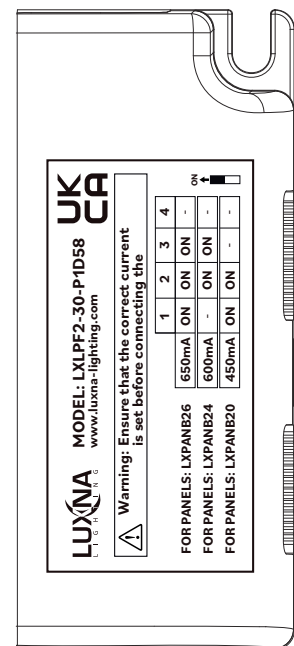


Remote dimmable driver for use with LED Panels, Multi Dimming technology: PUSH, 0-10V, DALI

Technical Specification:

- PUSH control using retractive (non-latching) switch
- 0-10V control using rotary or slider potentiometer
- Built in DALI protocol
- Flicker free, ENEC Approved
- Short circuit, over-temperature and over-voltage protection
- Push-fit terminals, Wire diameter: 0.75 to 1.5mm²
- SELV isolation, Class II
- Rated life: 50,000 hours

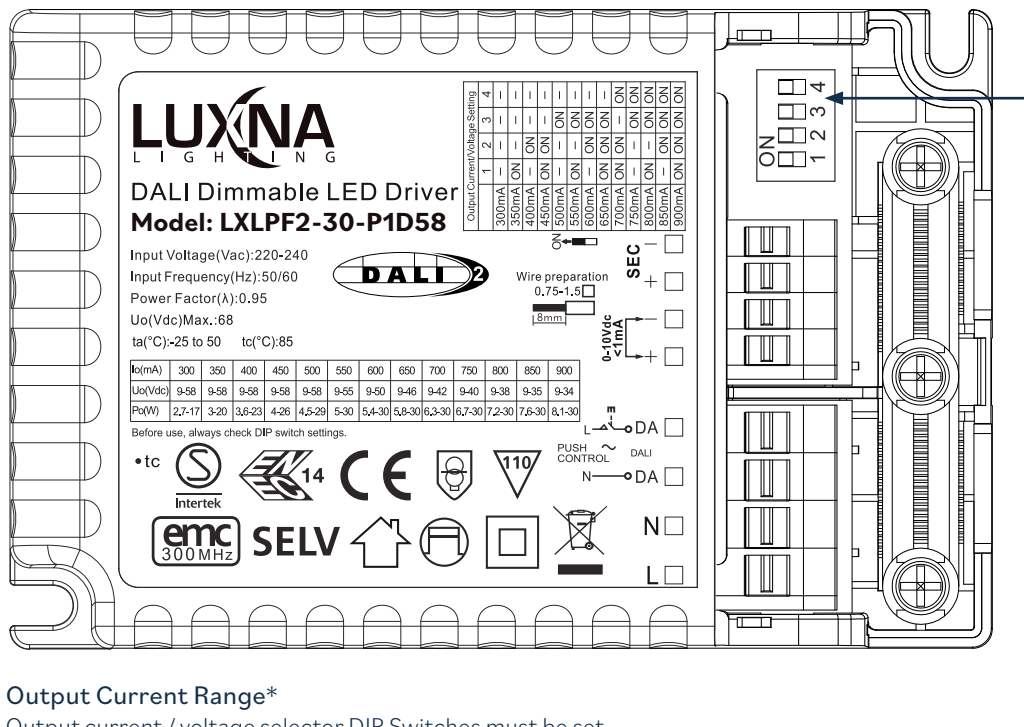

Terminal Cover

Output Current Range*

Output current / voltage selector DIP Switches must be set

For panels: LXPNB26	=	650mA	ON	ON	ON	-	ON
For panels: LXPNB24	=	600mA	-	ON	ON	-	ON
For panels: LXPNB20	=	450mA	ON	ON	-	-	ON

Refer to product instruction manual for wiring diagrams

Product Data:

Part No.	Dimming Type	Input Voltage	Output Current Range*	Output Power Range	Power Factor	IP Rating	Operating Temp. Range	Measurement L x W x H	Weight
LXLPF2-30-P1D58	PUSH, 0-10V, DALI	220-240V AC 50/60Hz	300mA to 900mA	3W to 30W	>0.95	IP20	-10°C to 40°C	103 x 67 x 22mm	162g

Product Compatibility

LED Recessed Panel: LXPNB26LED**, LXPNB24LED**, LXPNB20LED**, LXPNB30LED**, LXPNB28LED**, LXPNB30LED**

**Add colour temperature (NW or CW)

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at ±10%. The data values apply to an ambient temperature of +25°C. Specification details are subject to change without prior notification. E&OE. LXDDP1D58V3