

**CLAVIJAS AEREAS / MOBILE PLUGS**

Part code **CAV132/MY**

|                  |               |                                |
|------------------|---------------|--------------------------------|
| <b>Standards</b> | <b>BS4343</b> | <b>IEC309 IP44 Rated Units</b> |
|------------------|---------------|--------------------------------|

|                      |                                     |  |
|----------------------|-------------------------------------|--|
| <b>Voltage</b>       | <b>240V</b>                         | <b>17th Edition caravan hook up unit</b><br><b>1 x IP65 Enclosure</b><br><b>1 x Mains Switch</b><br><b>1 x RCBO 32a 30ma Dp</b><br><b>1 x IP44 32A 2P+E Outlet blue 240v</b><br><b>1 x KWH meter 45A</b> |
| <b>Amps</b>          | <b>32a</b>                          |  |
| <b>IP Rating</b>     | <b>44</b>                           |  |
| <b>Pin</b>           | <b>2P+E</b>                         |  |
| <b>Voltage Range</b> | <b>240v</b>                         |  |
| <b>Type</b>          | <b>17th Edition Caravan Hook Up</b> |  |
| <b>H Location</b>    | <b>6H</b>                           |  |



DP B Type 30mA

CPRO-32/2B




A single phase 45 Amp 1 module DIN rail mounted meter. Featuring a 5+2 LCD display and MID approval. This meter comes with a pulse output as standard.

**Dimensiones y conexiones / Dimensions & connections**





| Dimensiones / Dimensions |     |
|--------------------------|-----|
| Altura / Height          | 320 |
| Ancho / Width            | 205 |
| Profundidad / Deep       | 150 |

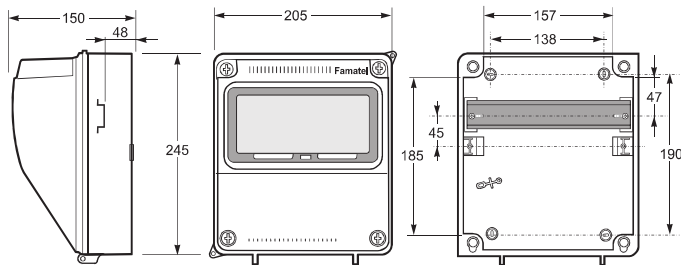

**No enlazable / No linkable**  
**Norma / Norm: EN62208**

- With screw terminals
- Housing material: PA6/ABS
- Contacts: Nickel-plated contacts

**IP44** Splashproof



**Certificaciones / Certifications**

Normativa aplicada / Applied Standards

IEC/CEI/EN 60309-1, IEC/CEI/EN 60309-2