




FLAC SITE

110V SLIMLINE FLOODLIGHT

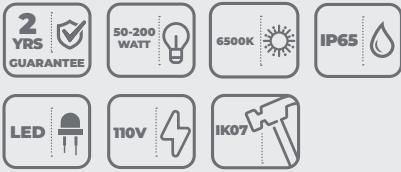

FLAC site floodlights are lightweight, yet robust, thanks to die-cast aluminium construction. Using cost-effective driver-on-board technology, the range offers high efficacy and value for money.

Features


- Ultra slim, lightweight design
- Bracket allows 360° adjustment
- High efficacy 95 lm/W
- Built in surge protection
- Pre-wired with 1m cable



Specification

Material:	Body: Die-Cast Aluminium Lens: Glass
Colour Temperature:	6500K
Colour Finish:	Yellow
CRI	Ra>80
LED Lifetime:	L70B50 30,000 Hrs
Beam Angle:	110° Symmetrical
IP Rating:	IP65
IK Rating:	IK07
Working Temperature:	-20°C to 45°C
Electrical Class	Class: I
Power Factor	0.9
Guarantee:	2 Years

Dimensions

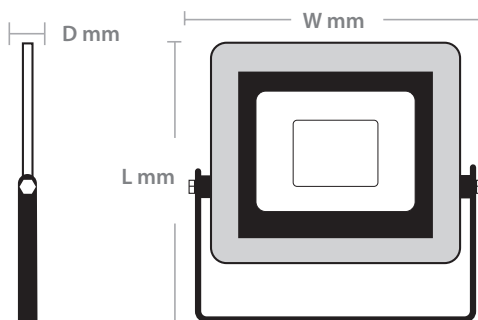

Product Code	Dimensions
FLAC50Y	L: 205mm, W: 165mm, D: 33mm
FLAC100Y	L: 290mm, W: 230mm, D: 41mm
FLAC150Y	L: 330mm, W: 270mm, D: 47mm
FLAC200Y	L: 390mm, W: 330mm, D: 47mm

Product Code	Description	Wattage	Lumen Output	Efficacy	Weight (Kg)	Barcodes
FLAC50Y	FLAC Site Floodlight	50W	4750 lm	95 lm/W	0.68	5055807620727
FLAC100Y	FLAC Site Floodlight	100W	9500 lm	95 lm/W	1.32	5055807620734
FLAC150Y	FLAC Site Floodlight	150W	14250 lm	95 lm/W	1.72	5055807620741
FLAC200Y	FLAC Site Floodlight	200W	19000 lm	95 lm/W	3.00	5055807623834



FLAC50Y



FLAC100Y





FLAC150Y



FLAC200Y

Light Distribution Curve - Product shown FLAC50Y

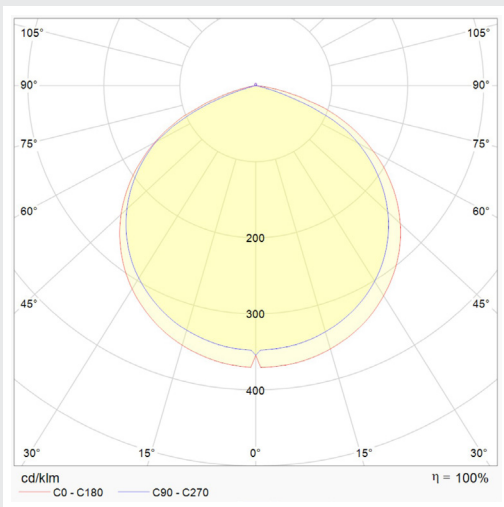

www.redarrowelectrical.co.uk