


Product Code: CMA30036

Luckinslive 422559812

Description: 13A 2 Gang Zigbee Smart Switched Socket Outlet

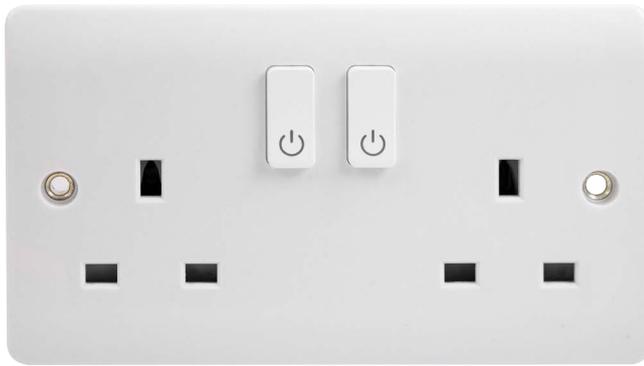

## General Information

	Range	<b>MODE</b> <sup>®</sup>	
Plate Fixing Centres - Horizontal (mm)		120.6	
	Style	Rounded Profile	
	Materials	Front Plate: Urea Terminals: Brass Internal Busbars: Formed Pressed Brass	Rear Housing: Nylon Terminal Screws: Steel & Yellow Passivated Electronics: PCB & Electronic Components
Operating Voltage (AC)		250	Frequency (Hz) 50
Resistive Load Rating (A)		13	
	Termination Type	Screw	
	Terminal Size (mm)	5.7 x 4.8	Terminal Torque Value (Nm) 1.2
Terminal Capacity - Solid (mm <sup>2</sup> )		3 x 2.5 or 2 x 4	
	Single Pole Switched	Yes	
	3 Pin Safety Shuttered	Yes	
	Twin Earth Terminals	Yes	
	Protocol	Zigbee	Signal Transmission Frequency 2.4GHz
Open Air Wireless Range (M)		<160	
	Standby Current (mA)	1	
	Indicator Colour	White & Orange	
Minimum Back Box Depth (mm)		25	
	Ingress Protection	IP20	
Operational Temperature (°C)		-5 to +40	
	Warranty (Years)	3	

**Standards** BS 1363-2, BS EN 61000-6-1, BS EN 61000-6-3, BS EN 60669-2-1 in conjunction with BS EN 60669-1

## Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.  
 3 pin safety shutter. The shutter will only open once all three plug pins are inserted.  
 Zigbee signal mesh  
 Enables manual control (unless locked), wireless control and automated control  
 Voice control via ClickSmart+ Hub using Alexa and/or Google Home.  
 Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.  
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.  
 All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases as well as anti-viral properties against enveloped and non-enveloped viruses.  
 All products have been independently tested with 99.9% of enveloped viruses and 92% of non-enveloped viruses killed off whilst achieving a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.

**Components Supplied** Smart Socket Outlet Fixing Screws Screw Caps Instruction Manual

**Programming Information** With hub and app setup and socket wired and powered, press one of the switches for five to ten seconds, the orange LED indicator starts flashing. Can be paired with hub via app.



CLICK OR SCAN



CLICK OR SCAN