



Available finish: White

Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

IP20 240V~50Hz 3W-18W

These fittings are Class II: Double insulated, No Earth required.

**Important Information**

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. These products are designed for connection to a 240V~50Hz supply.

Any faulty, broken or damaged luminaires should be replaced immediately.

KSR will not accept responsibility for any claims arising from a poor installation.

Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, adverse temperature (normal operating ambient temperature -10 - 30°C), humidity conditions, fluctuations in the electrical system or physical abuse as well as failure related to workmanship in the installation of the products or parts.

**Important User Advice**

Always switch off mains supply before fitting or servicing.

This luminaire is suitable for indoor use only and should not be fitted to damp or wet surfaces such as freshly plastered or painted surfaces.


Do not use Megger or similar high voltage instruments. Due to the fact this luminaire contains electronic components that maybe damaged by high test voltages, they must be disconnected from the circuit before testing. To prevent damage to the luminaire, do not mix with conventional magnetic ballasts on the same electrical circuit.

At the end of life the luminaire is classed as WEEE under directive 2014/30/EU and should be disposed of in accordance with local legislation.

**Installation Procedure**


Install as below using the fixing clips provided. The cabinet lights can be mounted to illuminate downward or backward depending on requirements Fig. 1.

Connect to mains supply cable supplied to a suitable junction box, the mains cable can be cut to length as required. Plug the mains cable into the cabinet light, select the colour you require switch on and test. **DO NOT SWITCH COLOURS WHILE POWERED ON** as this could damage the luminaire.

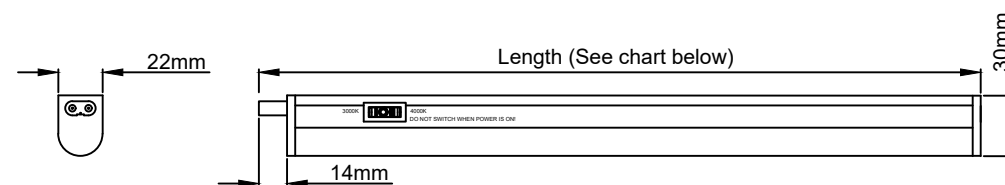

Fittings can be continuously linked to a max of 10 fittings

← Direction of supply (One way)




Product Code	Length	Wattage	Lamp Colour	Lumens	Lamp Colour	Lumens
KSRCL194	250mm	3W	3000K	320	4000K	330
KSRCL195	344mm	4W	3000K	455	4000K	480
KSRCL196	571mm	7W	3000K	900	4000K	950
KSRCL197	905mm	14W	3000K	1835	4000K	1965
KSRCL198	1205mm	18W	3000K	2285	4000K	2375

**The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced**

*KSRCL194/95 contains a light source of energy efficiency class E  
KSRCL196/98 contains a light source of energy efficiency class D*

Fig. 1 Under Cabinet application

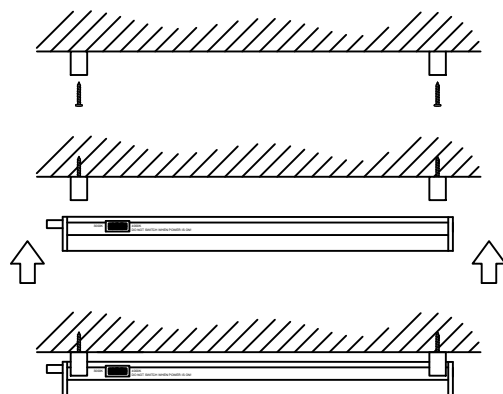

2m  
Start of run lead  
One supplied with  
each luminaire



Link Leads (Available to order)  
150mm (KSRCL144)  
300mm (KSRCL145)  
500mm (KSRCL146)  
1000mm (KSRCL147)

