
NiGLON Industrial **Accessories**

NG85-50 IP66 Membrane Moulded

| Technical Specifications | |
|---------------------------------------|---|
| Voltage | 400V |
| Material | PP+GF, Gasket TPE, Flame Retardant, UV Resistant |
| Glow wire test | 750°C |
| Temp. Range | -30°C - +100°C |
| Membrane or threaded cable entries | 6xM20 |
| Standards | CE &Rohs |
| IP Rating | IP66 |
| Dimensions | 86 x 49 x 50mm |
| Colours | White, Black, Grey |

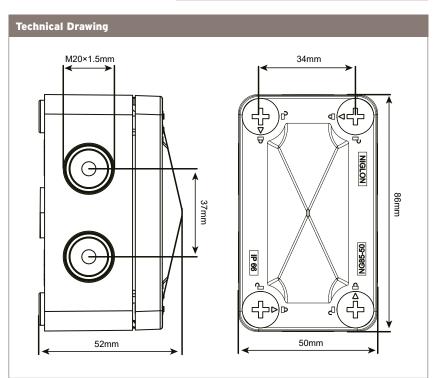

o121 711 1990 niglon.co.uk | www.niglon.co.uk

E&OE. Whilst every care has been taken in ensuring the accuracy of this document, the Suppl accepts no liability whatsoever for any eventuality arising from errors or omissions within its catalogues, brochures, printed media or within any online presence.