



EternaPro
LED
5 YEAR
Warranty*

Eterna
Everyday Lighting For Professionals



Slide cover to access
the shaver socket

SHAVERS ONLY
110V 240V

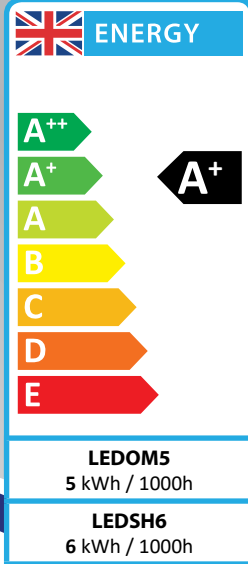

“DESIGNER STYLE” SHAVERLIGHT & MATCHING NON-SHAVER LUMINAIRE

Contemporary “designer style” alternative to standard functional products.

- Vertical or horizontal mounting
- Elegantly integrated push switch
- Suitable for use in Bathroom Zone 3
- IP21 rated and insulated class 2 construction
- Available in chrome or white to compliment most bathroom decors

Shaver Light Versions:

- Permanent power to shaver socket allowing use when not illuminated
- Dual voltage 110V and 240V shaver socket located under a slide to open cover maintains sleek appearance when not in use

• M.O.M: 1 / O.P.Q: 10

Both shaverlight and non-shaver versions are matching,
creating an aesthetically pleasing appearance.



On/off
push
button

Code	Version	Colour	Wattage	Colour Temp.	Luminaire Lumens	Avg. Rated Life (Hrs)	IP Rating	UK Energy Rating
LEDOM5CR	Over Mirror Light	Chrome	5W	3000K	520 lm	25,000 hrs	IP21	A+
LEDOM5WH		White						
LEDSH6CR	Dual Voltage Shaver Light	Chrome	6W					
LEDSH6WH		White						

LED LAMP SPECIFICATIONS:	5W	6W
Luminaire lumens (with diffuser)	520 lm	520 lm
Lumens from chip (no diffuser)	595 lm	595 lm
Useful lumens	465 lm	465 lm
Rated Wattage	5W	6W
Rated luminous flux	465 lm	465 lm
Nominal life time of the lamp	25,000 hrs	25,000 hrs
Colour temperature	3000K	3000K
Number of switching cycles before premature lamp failure	12,500	12,500
Warm-up time up to 60% of the full light output	<1s	<1s
Dimmable	No	No
Nominal beam angle	120°	120°
Rated power	5W	6W
Rated lamp lifetime	25,000 hrs	25,000 hrs
Lamp power factor	>0.5	>0.5
Lumen maintenance factor at end of nominal life	70%	70%
Starting time	<0.5s	<0.5s
Colour rendering	≥80	≥80
Colour consistency	Within a six step Macadam ellipse	Within a six step Macadam ellipse
Rated peak intensity	149cd	149cd
Rated beam angle	120°	120°
Voltage / Frequency	240V~50Hz	240V~50Hz
Lumen efficacy	104 lm / W	86.6 lm / W
Class 2 double insulated		
Not suitable for accent lighting		

*Subject to terms & conditions