


ON-X BACKLIT PANEL (12x6)

OX-BL-60-12X6NW



LIGHTING & SECURITY




Q-DRIVE

Driver as Standard

EPISTAR

LED's inside


TECHNICAL DRAWINGS

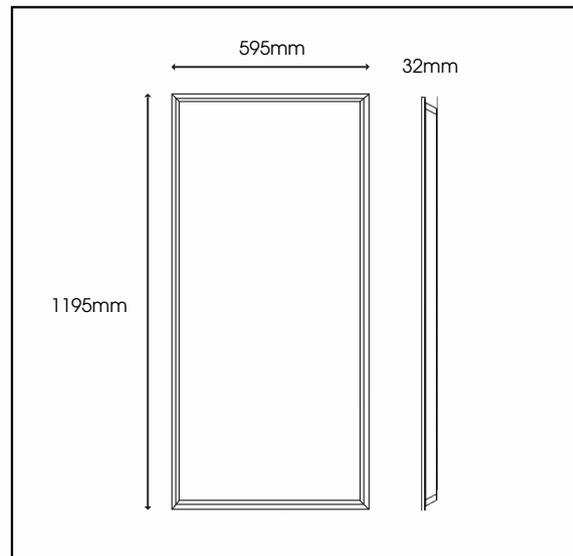

Specification	On-X Backlit 12x6
System Power	60W
Driver Manufacturer	Q-Drive
LED Chipset	Epistar
Diffuser	Opal
Colour Rendering Index	>80
Typical UGR	<23
LED Efficacy	105 Lm/cW
Lumen Output	6300Lm
Fire Rating	TP(b)
Dimmable	On request
Power Factor	>0.95
IP Rating	IP44
Beam Spread	120 °
Colour Type	Single
Colour Temperature	4000K
Housing Material	Aluminium
Operating Temperature	-20 to 45 °C
Input Voltage	AC 200-240V, 47-63Hz
Weight	4kg
Dimensions	1195mm x 595mm x 32mm
Lifetime	50,000 hours, L70-B10 (Ta 25 °C)
CE Standards	EN60598-1, EN 60598 2-2, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

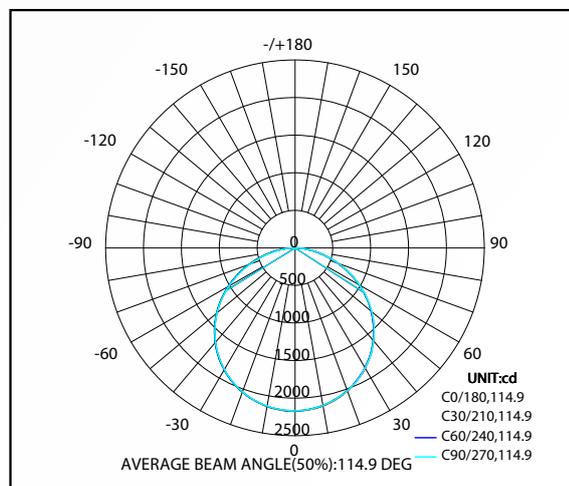

MODULAR & RECESSED RANGE