


Q-FLOOD ASYMMETRIC

QFLOOD-150CW/AS




Driver as Standard



LED's inside

TECHNICAL DRAWINGS

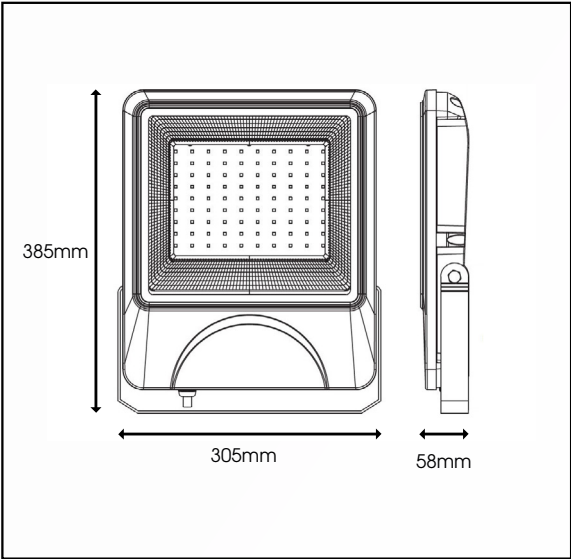

| Specification | QFlood 150W AS |
|------------------------|----------------------------------|
| System Power | 150W |
| Driver Manufacturer | Mean Well |
| LED Chipset | Epistar |
| Colour Rendering Index | >80 |
| Lumen Output | 18000Lm |
| LED Efficacy | 120 Lm/cW |
| Beam Angle | 150°75° |
| Power Factor | 0.95 |
| IP Rating | IP66 |
| Colour Temperature | 6000K |
| Housing Material | Aluminium |
| Lens Material | Glass |
| Input Voltage | AC85-277V, 50-60Hz |
| Operating Temperature | -25 to 50 °C |
| Weight | 5.1kg |
| Dimensions | 385mm x 305mm x 58mm |
| MacAdam Step | <3 |
| Lifetime | 50,000 hours, L70-B10 (Ta 25 °C) |

* Warranty terms and conditions apply

EXTERNAL RANGE