

Datasheet

DECO 2.0



Product Description

DECO 2.0 is a robust bollard with a classic look suitable for most schemes. It comes with an on site adjustable output and both emergency and photocell options. The effect is a comfortable, low-glare light output tailored for your site.


Specification Text

The luminaire shall be manufactured from high-pressure die-cast aluminium. It shall have an LED efficacy of up to 124lm/W and will be capable of producing up to 1,860 luminaire lumens at 4000K with a CRI >70. It shall have a radial distribution and is rated at IP65 and IK08.

Specification

Weight: 5.4-5.7kg
 Material: Die-cast Aluminium
 Paint finish: RAL7016 Anthracite Grey Marine Grade
 Embodied Carbon: 97 kg CO₂e

Optics



Radial

Key Features

- 7.5 - 15.0W
- 930 - 1,860 Luminaire Lumens
- Efficacy up to 124lm/W
- 4000K, CRI >70
- Lifetime >50,000hr, L70



Mounting Options

- Flange Mount
- Root

Other Options

- Photocell Option
- Emergency
- Emergency Self Test
- 180° Spill Shield
- Impact Kit
- Bike Rack Accessory
[Contact for details](#)




Circular Economy Score	
0 to 0.5	Very poor circular economy performance
0.5 to 1.5	Some circular economy functionality
1.5 to 2.5	Definite/ substantial progress to circularity
2.5 to 4.0	Excellent circularity

Code	Power	Luminaire Lumens	Drive Current	Optic	CCT(K)	IP	IK	Weight kg	Paint Finish	Driver Included	Driver Type
DEC715	7.5/15	930/1860	250/500	Radial	4000	IP65	IK08	5.4	RAL7016 Anthracite Grey	Driver Inc	Fixed
DEC715PEC	7.5/15	930/1860	250/500		4000	IP65	IK08	5.5	RAL7016 Anthracite Grey	Driver Inc	Fixed
DEC715EM	7.5/15	930/1860	250/500		4000	IP65	IK08	5.6	RAL7016 Anthracite Grey	Driver Inc	Fixed
DEC715EMPEC	7.5/15	930/1860	250/500		4000	IP65	IK08	5.7	RAL7016 Anthracite Grey	Driver Inc	Fixed



Dimensions

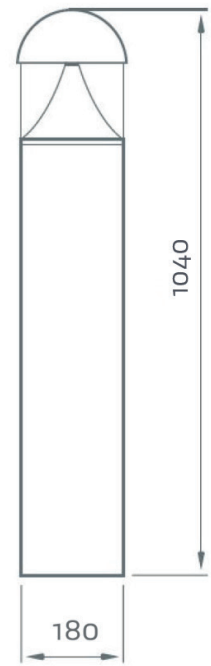

All measurements in mm