

ZONE 1 EXTRACTOR FAN

OSEF100-Z1/Z1PC//Z1T/Z1PCT/Z1PIR/Z1H
 OSEF150-Z1/Z1PC//Z1T/Z1PCT/Z1PIR/Z1H
 OSEF100C-Z1PC//Z1T/Z1PCT/Z1PIR/Z1H

Specification Sheet


Benefits & Features

- Specially designed mixed-flow impeller profile ensures high air flow and low noise level.
- Casing and impeller made of quality durable UV-resistant plastic.
- Backdraft damper for back flow prevention. Protection rating of IP45 and rated for installation in bathroom zones 1 & 2.
- Ideal solution for the ventilation of bathrooms and shower rooms.
- Low energy demand from 7.5 W due to a new high-efficient motor.
- The motor is mounted on special anti-vibration dampers.
- The exhaust pipe incorporates a specially designed air rectifier to reduce the air turbulence, increase pressure and lower the noise level.





Technical Data

Model	OSEF100-Z1/OSEF150-Z1	
Voltage (V)	220-240	220-240/50
Power (W)	7	91
Current (A)	0.049	0.09
Air Flow (m³/h (l/s))	97(27)	315(88)
SFP (W/l/s)	0.28	0.22
Sound Pressure Level (Dba)	25	33

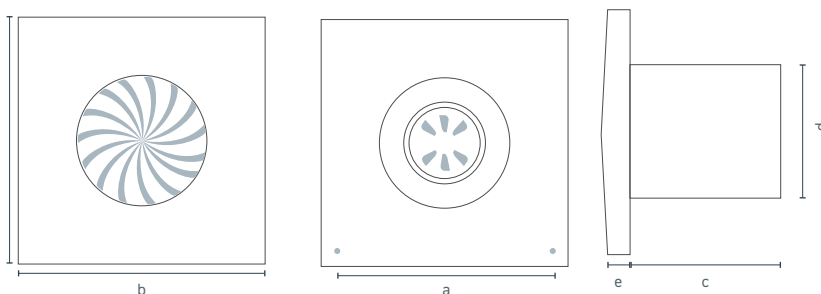

Dimensions

	a	b	c	d	e
OSEF100-Z1	136	158	81	100	26
OSEF150-Z1	190	214	98	148	32

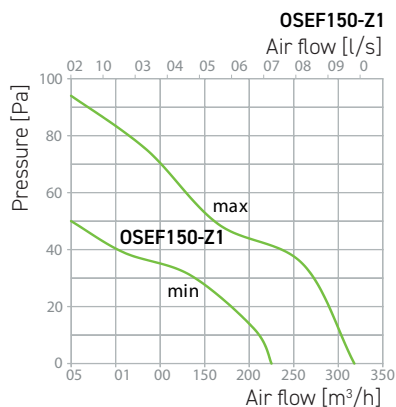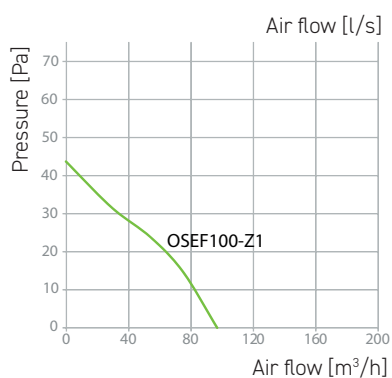

Options

FEATURE	OSEF-100-Z1/OSEF150-Z1					
	S	PC	PCT	T	PIR	H
Standard Operation	•					
Run-on timer				•		
Humidity Sensor						•
Pull Cord		•				
Pull Cord and Timer			•	•		
PIR Sensor Operation					•	

- Run-on Timer: Adjustable from 2-30 minutes
- Humidity Sensor: Humidity setpoint adjustable from 60% up to 90%