



#### Benefits & Features

- ✓ Wall and ceiling mounting.
- ✓ The casing, impeller and the front panel are made of high-quality and UV-resistant ABS plastic.
- ✓ The aerodynamic design of the impeller ensures high air flow and low noise level.
- ✓ The fan is equipped with a specially designed backdraft damper to prevent back flow and heat losses during the fan standby.
- ✓ Ventilation shaft mounting or connection to 100mm air ducts.
- ✓ Maintenance-free bearings contain enough grease for 40 000 hrs non-stop operation.



#### Technical Data

Model	OSEF100-CS/CH/CT
Voltage (V)	220-240
Frequency (Hz)	50
Power (W)	8
Current (A)	0.05
Air Flow (m <sup>3</sup> /h (l/s))	90(25)
SFP (W/l/s)	0.32
Noise Level (dBA)	29
Weight (Kg)	0.45

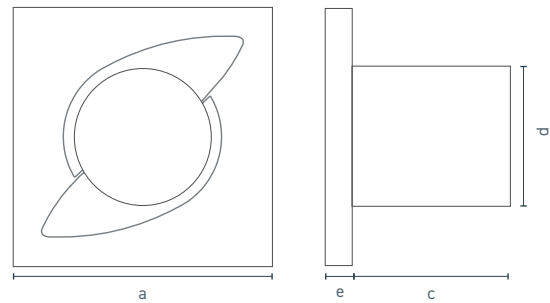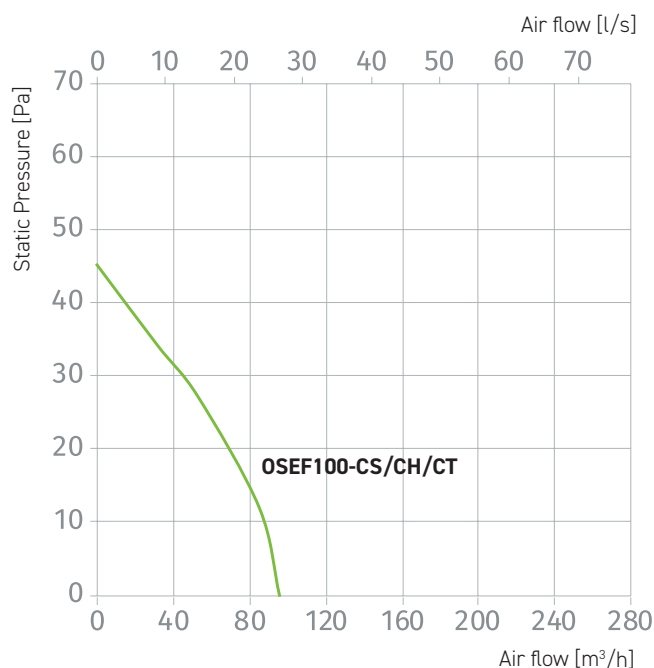

#### Dimensions

	a	c	d	e
OSEF100CS/CH/CT	150	79	99	23

#### Options

MODEL	OSEF100CS/CH/CT		
	S	T	H
Standard Operation	•		
Run on timer		•	•
Humidity sensor			•

Run-on timer

Adjustable delay from 2 - 30 minutes

Humidity Sensor

Humidity sensor activation threshold is adjustable from 60% to 90%