

All Osily ventilation fans are manufactured to the highest standards. Our products are technologically advanced with a focus on innovation at heart.


Benefits & Features

- ✓ Continuous or periodic exhaust ventilation of bathroom, showers, kitchens and other residential premises.
- ✓ Wall and ceiling mounting.
- ✓ Modern design and aesthetic look.
- ✓ The casing, impeller and the front panel are made of high-quality and UV-resistant ABS plastic.
- ✓ The aerodynamic design of the impeller ensures high air flow and low noise level.
- ✓ Ventilation shaft mounting or connection to 100mm air ducts.




Technical Data

Model	OSEF100-BS/BH/BT/BPC
Voltage (V)	220-240
Frequency (Hz)	50
Power (W)	14
Current (A)	0.085
RPM (min ⁻¹)	2300
Air Flow (m ³ /h (l/s))	95(26)
SFP (W/l/s)	0.53
Sound Pressure Level (Dba)	34

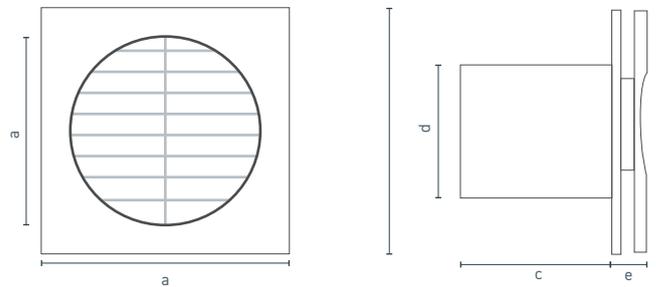

Dimensions

	a	b	c	d	e
OSEF100-BS/BH/BT/BPC	150	120	109	100	12.5

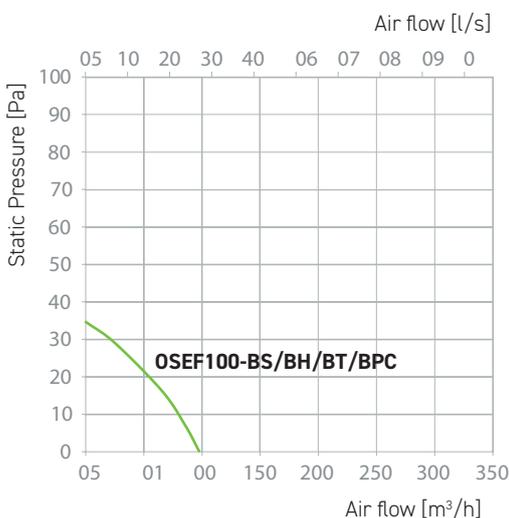

Options

FEATURE	OSEF100-BS/BH/BT/BPC			
	S	T	PC	H
Pull cord switch			•	
Standard Operation	•		•	
Run-on timer		•	•	•
Humidity sensor				•

Run-on timer

Adjustable delay from 2 - 30 minutes

Humidity Sensor

Humidity sensor activation threshold is adjustable from 60% to 90%