

All Osily ventilation fans are manufactured to the highest standards. Our products are technologically advanced with a focus on innovation at heart.



Benefits & Features

- ✓ Continuous or periodic exhaust ventilation of bathroom, showers, kitchens and other residential premises.
- ✓ Wall and ceiling mounting.
- ✓ Modern design and aesthetic look.
- ✓ The casing, impeller and the front panel are made of high-quality and UV-resistant ABS plastic.
- ✓ The aerodynamic design of the impeller ensures high air flow and low noise level.
- ✓ Equipped with a specially designed backdraft damper to prevent back flow and heat losses during the fan standby.
- ✓ Ventilation shaft mounting or connection to 100mm air ducts.



Technical Data

Model	OSEF100-BS/BH/BT
Voltage (V)	220-240
Frequency (Hz)	50
Power (W)	14
Current (A)	0.085
RPM (min ⁻¹)	2300
Air Flow (m ³ /h (l/s))	95(26)
SFP (W/l/s)	0.53
Sound Pressure Level (Dba)	34

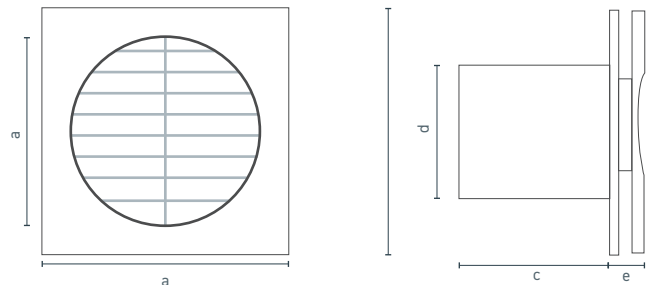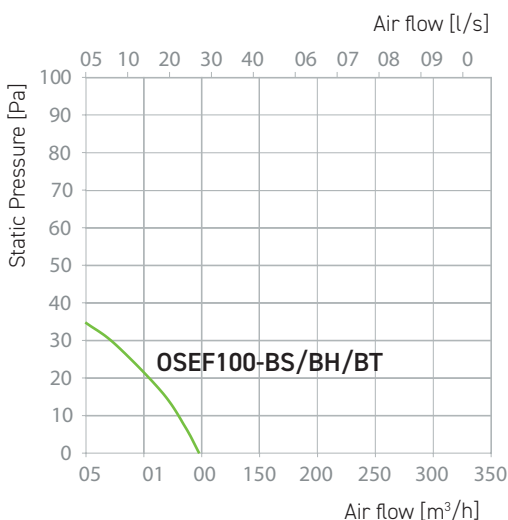

Dimensions

	a	b	c	d	e
OSEF100-BS/BH/BT	150	120	109	100	12.5

Options

FEATURE	OSEF100-BS/BH/BT		
	S	T	H
Standard Operation	•		
Run-on timer		•	•
Humidity sensor			•

Run-on timer

Adjustable delay from 2 - 30 minutes

Humidity Sensor

Humidity sensor activation threshold is adjustable from 60% to 90%