

# BASE FAN SHOWER KIT

## OSEF100-BSFKT/BSFKTL

### Specification Sheet

#### Benefits & Features

- 4" 100mm diameter size body to fit standard solid and flexible ducting.
- Slim profile for mounting in tight spots.
- Equipped with built-in adjustable run on timer.
- Quiet running axial flow impeller.
- Supplied with 100mm ducting, external wall vent & clips.

#### OSEF100-BSFKTL

Supplied with combined ceiling diffuser & 4.6k LED light: 4000k MR16 fitting.



combined ceiling diffuser & 4.6k LED light





#### Technical Data

Model	OSEF100-BSFKT/BSFKTL
Voltage (V)	220-240
Frequency (Hz)	50
Power (W)	16
Current (A)	0.085
RPM (min <sup>-1</sup> )	2300
Air Flow (m <sup>3</sup> /h (l/s))	137
SFP (W/l/s)	0.5
Sound Pressure Level (Dba)*	38

\* Sound pressure level measured in free space at a distance of 3 meters from the fan.

#### Options

	OSEF100-BSFKT/BSFKTL
Timer	•

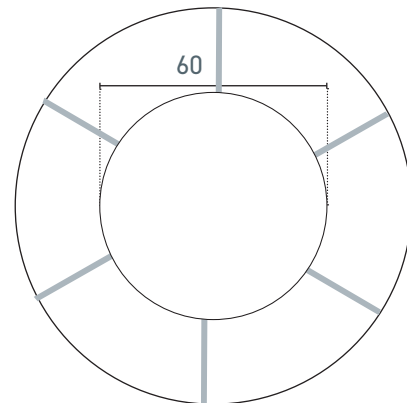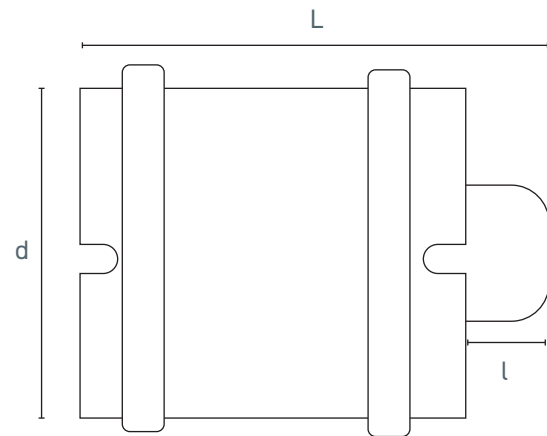

Supplied with mounting bracket

#### Dimensions

	d	L	l
OSEF100-BSFKT/BSFKTL	99	120	28

