

Fire Rated Downlight 5-7W LED CCT4



Wattage / Output Selector Switch:

5 Watt – 550 Lumen / 7 Watt – 750 Lumen

Colour Selector Switch:

2700K Extra Warm White, 3000K Warm White, 4000K Neutral White and 6000K Cool White

- Fire rated for 30, 60 and 90 Minute ceilings
- Dimmable, remote flicker free driver
- Low profile design, aluminium heatsink and steel housing
- Removable Push-Fit terminal connector, Loop in /Loop out
- Twist and lock Matt White bezel included: Additional colours available
- Beam angle lens: 60°
- IP rating: IP65
- Colour rendering index: Ra80
- Rated life: 50,000 hours
- Operating temperature: -10°C to 40°C
- Voltage and Frequency rating: 220-240V AC ~ 50/60 Hz
- Options available:
 - Emergency 3-hour remote pack LXLPF2-4SP200-EM3

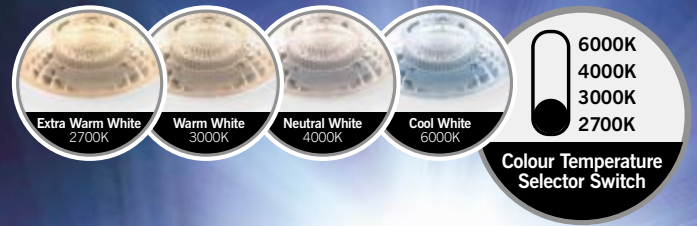

Part No.	Description	Wattage	Measurement W x H	Cut Out Diameter	Lumen Output	IP Rating Front	IP Rating Rear	CRI Ra	Colour Temperature
LXFRD/5-7/CCT4	LED Fire Rated Downlight	5W-7W	88 x 45mm	72mm	550 / 750lm	IP65	IP20	>80	2700K, 3000K, 4000K, 6000K
Bezels									
LXFRD/5-7/BCB		Brushed Chrome Bezel			LXFRD/5-7/MBB	Matt Black Bezel			
LXFRD/5-7/PCB		Polished Chrome Bezel			LXFRD/5-7/MWB	Matt White Bezel			
LXFRD/5-7/PBB		Polished Brass Bezel			LXFRD10/SCS	Spare Spring Clips - Set of 2			



Email sales@luxna.co.uk



Web luxna-lighting.com