




DOWNLIGHTS SPECIFICATION SHEET



**COLLINGWOOD
LIGHTING**

01604 495 151
collingwoodlighting.com

-  /collingwoodlighting
-  /collingwoodlighting
-  collingwoodled

H2 Lite CSP

Fixed, fire rated downlight, colour switchable via switch under the bezel

FEATURES

IP rating	IP65
Colour flexibility	Colour switchable
Tilttable	No
Rotation angle	N/A
UGR	28
Dimmable	Yes
Input	220-240V 50/60Hz
LED Lifetime	50,000h L70 B10
CRI	>90Ra
SDCM	3SDCM
Flicker Free	Yes
Emergency version available	No

INSTALLATION INFORMATION

Install Connector Type	Integrated push-fit terminal connector
Insulation Coverable	Blown and rolled
Cut Out Size	Ø 64-72mm
Bathroom zone	1
Inrush Current	5A 0.15ms
Construction Material	Mild steel / V0 rated plastic
Maximum ceiling thickness	40mm
Weight	166g
Maximum ambient temperature	40°C
Building regulations	Part B, C, E, P, L

GUARANTEE / WARRANTY

4 year extended warranty

FEATURES & BENEFITS

- Driver on a flexible neck
- Insulation coverable, rolled and blown
- Mains dimmable
- Fixed with 55 degree beam angle
- Compatible with H2 Twist and lock bezels
- Colour switchable
- High CRI >90Ra
- 100lm/W+
- Single point source design
- Compatible with the Collingwood Smart range

PHOTOMETRICS @ 25°C

Product code	Wattage	Colour	Beam angle	lm	lm/W	lx @ 1m
DLT5515000	5.4W	2700K/3000K/4000K	55°	520/560/560	96/104/104	406/437/437
DLT5514000	4.0W	2700K/3000K/4000K	55°	390/430/430	98/108/108	312/344/344


LED DRIVERS

Product code	Input	SELV	Dimming	Bathroom zone	Min	Max
N/A (integrated SELV driver)	N/A	N/A	Yes (mains)	1 (ceiling only)	N/A	N/A
N/A (integrated SELV driver)	N/A	N/A	N/A	N/A	N/A	N/A

ACCESSORIES

H2 Bezels	Twist and lock bezels	Sold Separately
DLCVT110	Concealer ring for larger cut outs	Sold Separately
Collingwood Smart System	Accessories to upgrade to smart	Sold Separately
DM298FP	Faceplate dimmer	Sold Separately
DM298GRID	Grid dimmer	Sold Separately

Beam angle: 55°

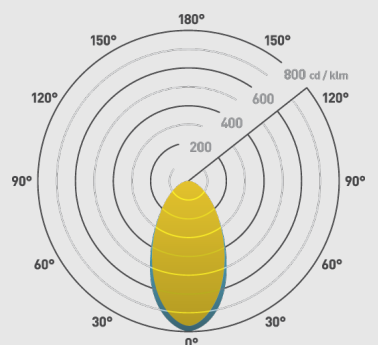

Ø90/175mm

