

All Osily ventilation fans are manufactured to the highest standards. Our products are technologically advanced with a focus on innovation at heart.

Benefits & Features


- ✓ Continuous or periodic exhaust ventilation of bathroom, showers, kitchens and other residential premises.
- ✓ Wall and ceiling mounting.
- ✓ Modern design and aesthetic look.
- ✓ The casing, impeller and the front panel are made of high-quality and UV-resistant ABS plastic.
- ✓ The aerodynamic design of the impeller ensures high air flow and low noise level.
- ✓ Equipped with a specially designed backdraft damper to prevent back flow and heat losses during the fan standby.
- ✓ Ventilation shaft mounting or connection to 150mm air ducts.



Technical Data

MODEL	OSEF150-BS/BT/BPC/BH
Voltage (V)	220-240/50
Power (W)	24
Current (A)	0.13
RPM (min ⁻¹)	2400
Air Flow (m ³ /h (l/s))	292(81)
SFP (W/l/s)	0.3
Sound Pressure Level (Dba)*	38

*Sound pressure level measured in free space at a distance of 3 meters from the fan.

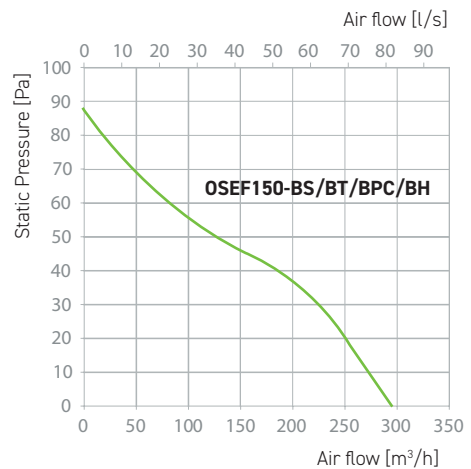

Options

OPTION	OSEF150-BS/BT/BPC/BH			
	S	T	PC	H
Pull cord switch	•		•	
Turn-on delay timer			•	•
Turn-off delay timer		•	•	•
Humidity sensor				•

- Turn-on Delay Timer Delay time 45 seconds
- Turn-off Delay Timer Adjustable delay from 2 to 30 minutes
- Humidity Sensor Humidity sensor activation threshold is adjustable from 60% to 90%

Dimensions

	a	b	c	∅ d	e
OSEF150-BS/BT/BPC/BH	205	165	132	150	13

