

# AV600 Passthrough Powerline Starter Kit

**Extend Reliable Wired Connection** to Every Room








# Highlights

## **Extend Internet to Every Room Using Existing Electrical Wiring**

With advanced HomePlug AV600, the TL-PA4010P KIT transforms your home's existing electrical circuit into a high-speed network with no need for new wires or drilling and brings wired network to anywhere there is a power outlet.

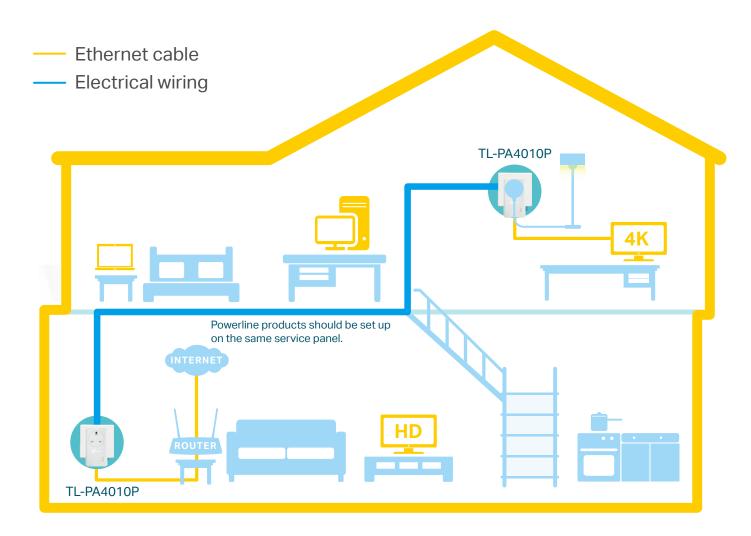


• No need for new wires or drilling • Network passes through walls and floors

#### Plug and Play!

Powerline adapters and extenders must be deployed in a set of two or more and be connected to the same service panel.

### **Plug and Play**

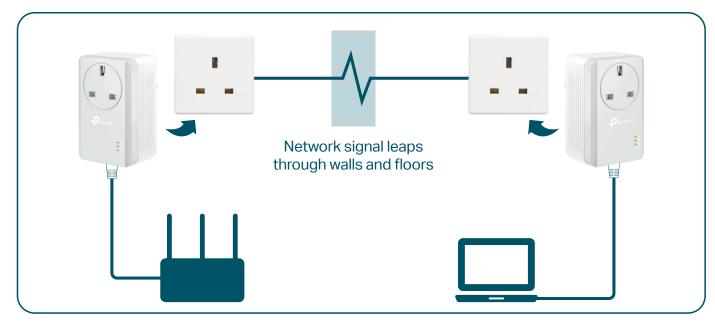


## Highlights

#### HomePlug AV Standard Compliant<sup>‡</sup>


Provides users with stable, high-speed data transfer rates of up to 600 Mbps‡ to meet everyday use.

An integrated socket lets you power regular devices as normal, and a built-in noise filter prevents them from interrupting the powerline signal.

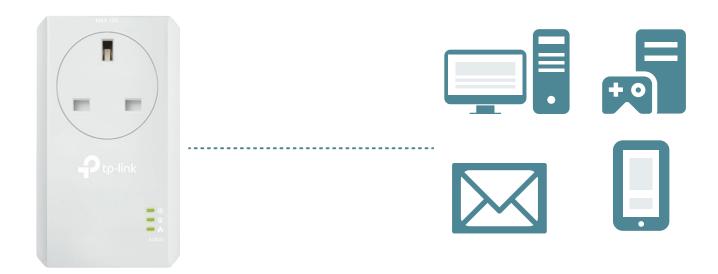

### One-Button Security

Simply push the Pair button on the adapters, and quickly set up a hassle-free powerline network.

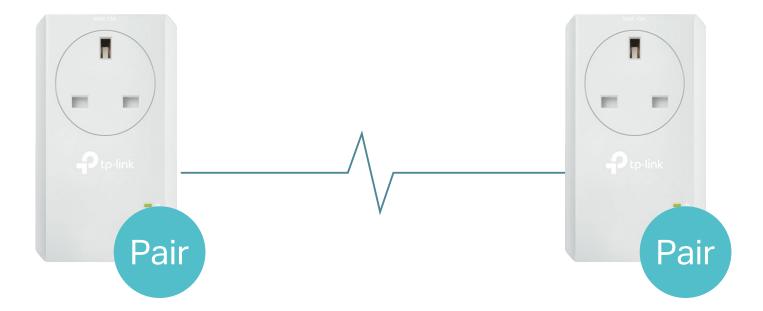


#### Features



- Ultra-fast Powerline Speed HomePlug AV standard compliant, high-speed data transfer rate of up to 600Mbps, ideal for Ultra HD streaming and online gaming
- Ethernet Port Provide reliable high-speed wired connection for game consoles, smart TVs and STB



· 300 meters Range – Up to 300 meters / 1000 feet range over the existing household power circuit.



 Mains Filter – Mains Filter inside the outlet reduces electrical noise interference and improves powerline communication performance



- · Plug and play Plug and play, no configuration required
- No new wires No new wires, use existing electrical wiring to expand your home network
- Keep your outlet An integrated socket lets you power regular devices as normal, and a built-in noise filter prevents them from interrupting the powerline signal.
- TP-Link tpPLC Allows you to easily manage your network using the tpPLC Utility
- Compatibility Works with all routers and HomePlug AV/AV2 powerline adapters/extenders<sup>†</sup>



## Security

 Pair Button – 128-bit AES encryption easily at a push of the "Pair" button



## **Energy Saving**

Power Saving<sup>§</sup> – Automatically switches to
"Power-Saving" mode when not in use, reducing its energy consumption by up to 85%

## Specifications

#### Hardware

· Plug Type: UK

· Standards and Protocols: HomePlug AV, IEEE 1901, IEEE 802.3, IEEE 802.3u

· Power Consumption: Maximum: 3.05 W

Standby: 0.75 W

· Range: 300 meters/1000 feet in house

· Interface: 1\* Built-in Ethernet Port

· Button: Pair Button

· LED Indicator: Power, Powerline, Ethernet

· Dimensions (W x D x H): 2.3 x 1.9 x 3.7 in (58 x 48.8 x 95 mm)





©2024 TP-Link

国際道道 For more information, please visit

§Actual power saving data will vary in different network conditions and environments.

or scan the QR code left

https://www.tp-link.com/products/details/?model=TL-PA4010P+KIT V6

Software

· Modulation Technology: OFDM (PLC)

· Encryption: 128-bit AES

#### **Others**

· Certification: CE, RoHS

· Package Contents:

AV600 Passthrough Powerline Adapter

2 \* TL-PA4010P

2 \* Ethernet Cables

Quick Installation Guide

System Requirements:

Windows11/10/8.1/8/7/Vista/XP, Mac OS X, Linux

· System Requirements for tpPLC Utility:

Windows XP/Vista/7/8/8.1/10/11 and Mac OS X (10.7 or later)

Environment:

Operating Temperature: 0°C~40°C (32°F~104°F)

Operating Humidity: 10%~90%RH, non-condensing

Storage Humidity: 5%~90%RH, non-condensing

Specifications are subject to change without notice. All the brands and product names are trademarks or registered trademarks of their respective holders. Copyright ©2024 TP-LINK CORPORATION PTE. LTD. All rights reserved. †Compatible with all HomePlug AV and AV2 Standard Powerline adapters. This product may not be compatible with routers or gateways with firmware that has been altered, is based on open source programs, or are non-standard or outdated. \*Maximum Powerline signal rates are the physical rates derived from HomePlug AV/AV2 specifications. Actual Powerline signal rates are the physical interference, volume of traffic and network overhead, AFCI circuit breaker, and Powerline adapters separated between two or more service panels.

www.tp-link.com