

Taurus Multi-Power & Tri-Colour


Surface & Suspended Range

CODE: TAU-WS-325TC

QVIS[®]
LED LIGHTING



TECHNICAL DRAWINGS

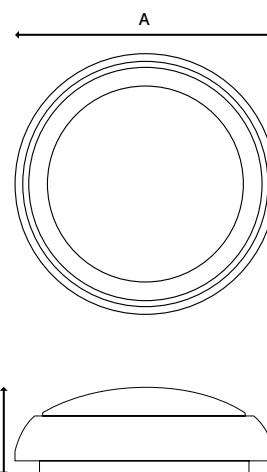

A = 325mm B = 109mm

| Specification | Taurus |
|---------------------------|--|
| System Power [Selectable] | 10W / 13W / 16W / 20W |
| Driver Manufacturer | Lifud |
| LED Chipset | Epistar |
| Colour Rendering Index | >80 |
| Lumen Output | 1050Lm / 1365Lm / 1680Lm / 2100Lm |
| LED Efficacy | 105 Lm/cW |
| Power Factor | >0.9 |
| Dimmable | On Request |
| IP Rating | IP65 |
| IK Rating | IK10 |
| Colour Temperature | 3000K / 4000K / 6000K |
| Housing Material | Polycarbonate |
| Diffuser Material | Polycarbonate |
| Operating Temperature | -20 to +40 °C |
| Input Voltage | AC220-240V |
| Dimensions | 325mm x 109mm |
| Weight | 0.89kg |
| MacAdam Step | <3 |
| Lifetime | 50,000 hours, L70-B10 (Ta 25 °C) |
| CE Standards | EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581 |
| CE Directives | LVD, EMC, ERP & RoHS |

* Warranty terms and conditions apply

LUMINOUS INTENSITY DISTRIBUTION

