

# Taurus Multi-Power & Tri-Colour

Surface & Suspended Range

CODE: TAU-WS-325TC/EM

**QVIS**<sup>®</sup>  
LED LIGHTING



**3HR**  
Emergency  
3W Battery



10W to  
20W  
Power


**5YR**  
Warranty\*



Tri  
Colour

1050 to  
2100  
Lumens

## TECHNICAL DRAWINGS

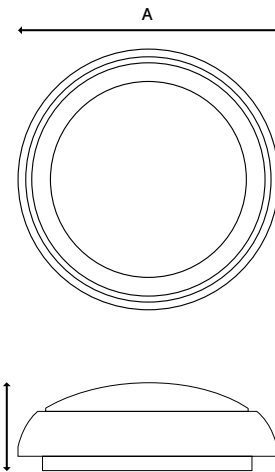

A = 325mm B = 109mm

Specification	Taurus
System Power [Selectable]	10W / 13W / 16W / 20W [Emergency 3W]
Driver Manufacturer	Lifud
LED Chipset	Epistar
Colour Rendering Index	>80
Lumen Output	1050Lm / 1365Lm / 1680Lm / 2100Lm [Emergency 315Lm]
LED Efficacy	105 Lm/cW
Power Factor	>0.9
Dimmable	On Request
IP Rating	IP65
IK Rating	IK10
Colour Temperature	3000K / 4000K / 6000K
Housing Material	Polycarbonate
Diffuser Material	Polycarbonate
Operating Temperature	-20 to +40 °C
Input Voltage	AC220-240V
Dimensions	325mm x 109mm
Weight	0.89kg
MacAdam Step	<3
Lifetime	50,000 hours, L70-B10 [Ta 25 °C]
Emergency Output	3 Hours [3W]
CE Standards	EN60598-1, EN62493, EN55015, EN61547, EN61000-3-2, EN61000-3-3, EN62722-1, EN62722-2-1 and EN50581
CE Directives	LVD, EMC, ERP & RoHS

\* Warranty terms and conditions apply

## LUMINOUS INTENSITY DISTRIBUTION

