



PLASTERER'S A-FRAME

PORTABLE SITE LIGHTING



Our Plasterer's A-Frame is a handy addition to the Weatherguard Site range. This portable fitting is easy to relocate and features a useful cable storage facility.

Features


- Lightweight and easy to relocate on site
- Strong, stable frame
- Includes 2x110V power outlets for connecting more fittings or power tools
- Supplied with 5m cable and pre-wired plug



Specification



Material:	Body & Diffuser: Polycarbonate Frame: Steel
Colour Temperature:	4000K
Colour Finish:	Yellow
CRI:	Ra>80
LED Lifetime:	L80B50 30,000 Hrs
IP Rating:	IP65
IK Rating:	IK07
Working Temperature:	-20°C to 40°C (Emergency version 0°C to 40°C)
Power Factor:	0.9
Emergency Battery Type:	Ni-Cd
Electrical Class:	Class I
Guarantee:	3 Years (1 year for emergency batteries)

Dimensions

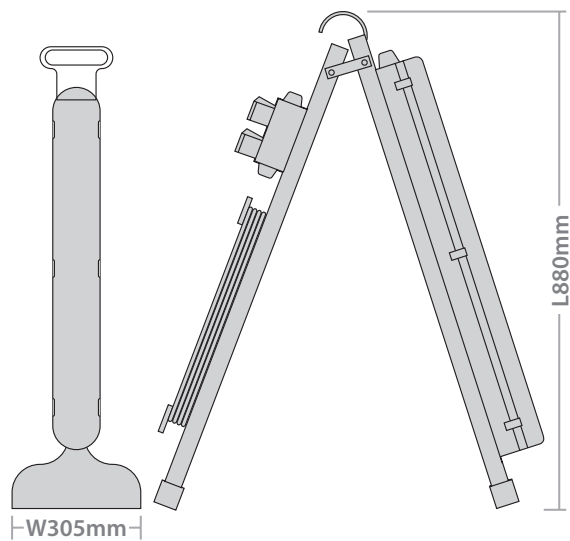

Product Code	Description	Wattage	Lumen Output	Emergency Lumen Output	Efficacy	Barcodes	Weight (kg)
WGS220Y/AF	Weatherguard Site A-Frame	20W	2000 lm	-	100 lm/W	5055807622769	3.0
WGS220Y-E/AF	Weatherguard Site A-Frame c/w 3Hr EM	20W	2000 lm	180 lm	100 lm/W	5055807622776	3.3

Light Distribution Curve

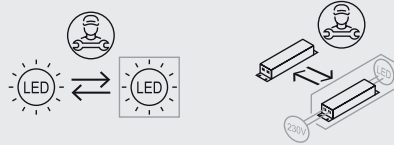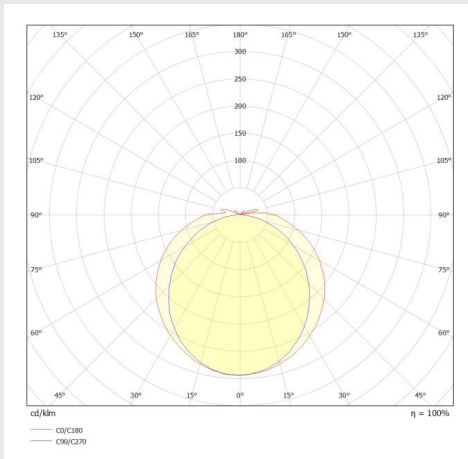

www.redarrowelectrical.co.uk