

Backlit LED Panel for T grid suspended ceilings, high transmission microprism diffuser TP(a) UGR<19, high efficacy 150Lm/W

**Technical Specification:**


Primary Materials	Aluminium frame, PC Diffuser
Remote Driver	Non Dimmable
Luminous Efficacy	150 Lm/W
Typical UGR	<19
Colour Temperature	4000K
Colour Rendering Index	Ra >80
Ingress Protection	IP20
Fire Rating	TP(a)
Beam Angle	90°
Power Factor	>0.90
Impact Resistance	IK02
Safety Class Rating	Class II
Operating Temperature	-10°C to +40°C
LED Lifetime	70,000h L70/B50 (Ta25°C)
Input Voltage & Frequency	AC220-240V 50/60Hz
Light Source Energy Efficiency	Class D
Warranty*	7 Years

150 LUMEN PER WATT
IP20
TP(a)
UGR <19
RATED LIFE 70,000 HRS
7 YEAR WARRANTY
□
◀ D




**Dimensions:**

Panel:

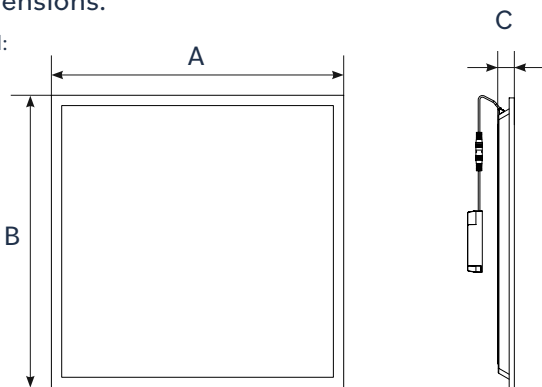

**Light Distribution Curve:**

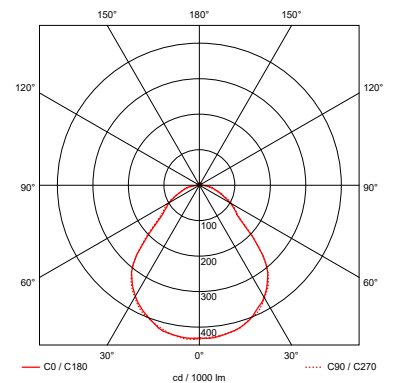

**Product Range Data:**

Part No.	Power	Lumen Output	Colour Temperature	Dimensions A x B x C	TP Fire Rating	IP Rating	Ra	Weight
LXPANB20LED66NW/A/19/P	20W	3000Lm	4000K	595x595x25mm	TP(a)	IP20	>80	1.68kg

**Accessories:**

Part No.	Description
LXERP/55/EM3	3Hr Emergency Remote Pack LiFePO4 240/10-55Vdc
LXERP/80/EM3	3Hr Emergency Remote Pack LiFePO4 240/10-80Vdc
LXERP/80/ST/EM3	3Hr Emergency Remote Pack LiFePO4 240/10-80Vdc - Self Test
LXLPF2-30-P1D58	Dimmable Driver Multi Function - Push switch, DALI, 0-10V
LXPANB66SMBK	Surface Mount Box Kit - 600x600
LXPANB66SCK	Suspension Cable Kit - 600x600

\*Warranty terms and conditions apply  
 Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at ±10%. The data values apply to an ambient temperature of +25°C. Specification details are subject to change without prior notification. E&OE. LXPANB5.05.23