

GLS High Efficient

07183 HEGLS06/E27-N30

High Efficient LED GLS 6W E27 3000K

- Colour temperature of 3000K, 4000K and 6500K
- Long life of 25,000h
- Save energy up to 85% compared with incandescent lamp



Overview

The latest GLS High Efficient lamp gives an even spread of light in all directions. It is highly functional and efficient, giving a quality of light that creates inviting living spaces while offering huge energy savings over filament lamps without compromising on brightness. The lamps can quickly replace filament products.



General Information

| | |
|--------------------------------|---------------|
| Ambient Temperature Range (°C) | -20°C to 40°C |
| IP Rating | IP20 |
| Protection Rating | Class II |
| Installation Area | Internal |

Compliance

| | |
|-----|---|
| LVD | EN 62031:2020, EN 62471:2008, EN 62493:2015+A1:2022, EN 62560:2012+A11:2019 |
| EMC | EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023 |

Technical Summary

| | |
|-------------------------------|--------------------|
| Product Code | HEGLS06/E27-N30 |
| Input Voltage Supply | 220-240Vac 50/60Hz |
| Default Power | 6 W |
| Default CCT | 3,000 K |
| SDCM of CCT | <6 |
| CRI | ≥82 |
| Dimmable | N |
| Flicker | <2% |
| Lumens Output Maximum | 1,000 lm |
| Maximum Efficiency | 167 lm/W |
| L70B50 Lifetime (h) @Ta 25 °C | 15,000 h |
| Nominal Lifetime (h) | 15,000 h |
| Glow wire temperature(°C) | 650 |
| Blue Light Hazard | RG1 |
| Weight | 0.036Kg |
| Dimensions (L x W x D) (mm) | 112xØ60 |
| LS Energy Efficiency Class | C |

Tel: 01635 523 713

Email: sales@kosnic.com


Kosnic.com



07183 HEGLS06/E27-N30

Overview

The latest GLS High Efficient lamp gives an even spread of light in all directions. It is highly functional and efficient, giving a quality of light that creates inviting living spaces while offering huge energy savings over filament lamps without compromising on brightness. The lamps can quickly replace filament products.

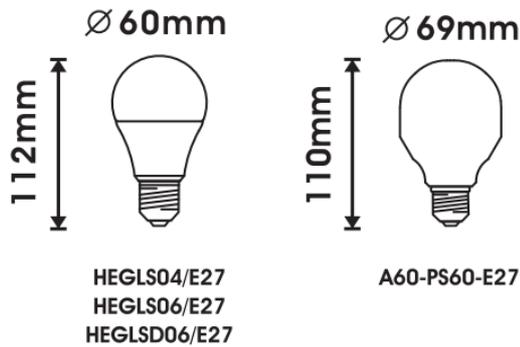

General Information

| | |
|--------------------------------|---------------|
| Ambient Temperature Range (°C) | -20°C to 40°C |
| IP Rating | IP20 |
| Nominal Lifetime (h) | 15,000 h |
| Protection Rating | Class II |
| Installation Area | Internal |

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

