

3 Hour Emergency Remote Pack with Self Test, IP20, for use with LED Panels

## Technical Specification:


Primary Materials	Polycarbonate
Emergency Operation	Non-maintained / Maintained, Self Test
Ingress Protection	IP20
Safety Class Rating	Class II
Operating Temperature	5°C to +35°C
Battery Charge Time	24 Hours
Emergency Duration	3 Hours
EM LED Power (Typical)	2W
Input Voltage & Frequency	AC220-240V 50/60Hz
Battery	LiFePO4 6.4V 1.5Ah
Warranty*	5 Years



Supplied with Green LED charge indicator and mounting clip

## Dimensions:

### Emergency Remote Pack

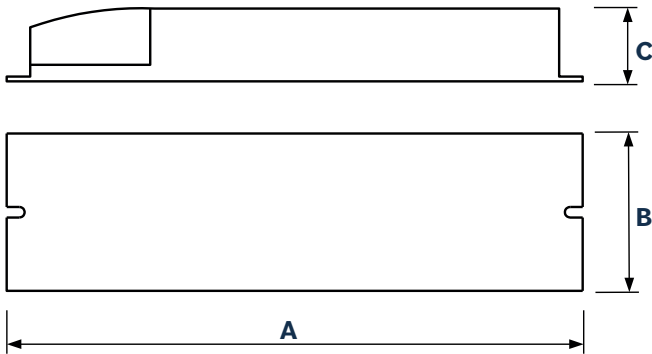

## Product Range Data:

Part No.	Power	Dimensions A x B x C	IP Rating	Class Rating	Weight
LXERP/80/ST/EM3	2W	245 x 67 x 32mm	IP20	Class II	0.25kg

## Accessories:

Part No.	Description
LXLPF2-ELC-W	LED Indicator Clip Housing - White



## Compatible Products:

Part No.	Description
LXPANB66	Back-lit 600x600 panel, LED, 26W/24W
LXPANB26	Back-lit 600x600 panel, LED, 26W
LXPANB24	Back-lit 600x600 panel, LED, 24W
LXPANB20	Back-lit 600x600 panel, LED, 20W
LXPAN30	Edge-lit 600x600 panel, LED, 30W
LXPAN60	Edge-lit 1200x600/300 panel, LED, 60W
LXPLR	Round panel, LED, 24W/18W/12W

\*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at ±10%. The data values apply to an ambient temperature of +25°C. Specification details are subject to change without prior notification. E&OE. LXERP/80/ST/EM3V2.11.25