



SFX/8C-TY2-PVC-WHT

8 Core Type 2 Alarm White PVC to BS4737-3.30:2015

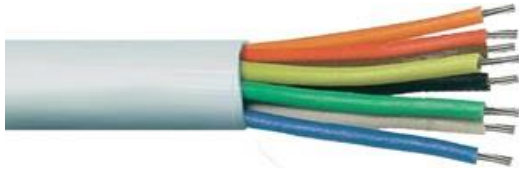

Cable Construction	7 Cores	1 Core
Conductor	Tinned Copper	Tinned Copper
Conductor Diameter (mm)	0.19 ±0.008 x 7	0.19 ±0.008 x 7
Stranded Diameter (mm)	0.22	0.22
Insulation	PVC	PVC
Insulation Thickness (mm)	0.21	0.30
Insulation Diameter (mm)	1.00 ±0.100	1.20 ±0.100
Insulation Colours	Red,Black,Blue, Yellow,Green,White,Orange	Brown
Nylon Rip-Cord	Red 210D	
Jacket	PVC	
Jacket Thickness (mm)	0.50	
Overall Diameter (mm)	4.20 ±0.200	
Jacket Colour	White RAL 9003	
Sheath Printing	(m)	
Reaction to Fire	Eca	
Electrical Characteristics		
Max Conductor DC resistance @ 20°C	100Ω/km	
Rated Temperature	-20°C to 80°C	
Rated Voltage	30V	
Insulation Resistance @20°C	>200 MΩ/km	
Compliance and Standards	BS4737-3.30:2015,RoHS2 2011/65/EU	
Application	For the interconnection of intruder alarm installations.	