


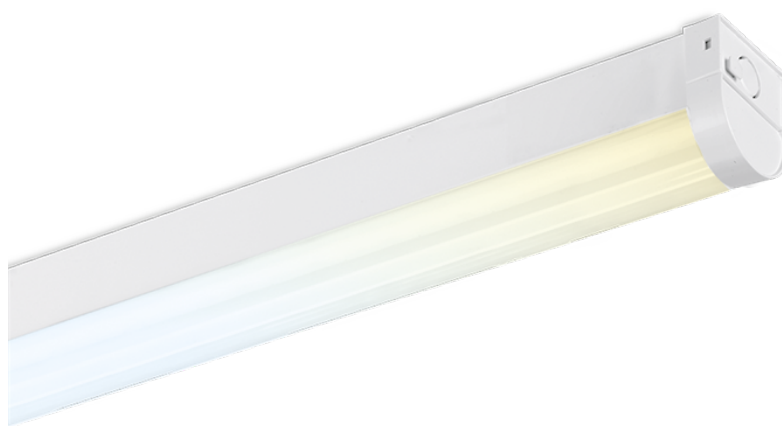


**Product Description:** BatPac<sup>™</sup>CWS Colour & Wattage Switchable 1200mm Batten


Offering 36 product combinations in one, this modular plug and play linear is colour switchable between 3000K, 4000K and 6500K, plus has a choice of wattage between 21W and 37W. Modular emergency packs and microwave sensors are available to purchase separately making the product perfect for the wholesaler to control stock levels and store less products, whilst also being simple for the contractor to convert on site.

| SKU Code     | Wattage | Colour | Lumens | Beam Angle | Finish Colour | SKU Type     |
|--------------|---------|--------|--------|------------|---------------|--------------|
| AU-BA1237CWS | 21      | 3000K  | 2950   | 120        | White         | Non Dimmable |
| AU-BA1237CWS | 21      | 4000K  | 3150   | 120        | White         | Non Dimmable |
| AU-BA1237CWS | 21      | 6500K  | 2950   | 120        | White         | Non Dimmable |
| AU-BA1237CWS | 37      | 3000K  | 5000   | 120        | White         | Non Dimmable |
| AU-BA1237CWS | 37      | 4000K  | 5350   | 120        | White         | Non Dimmable |
| AU-BA1237CWS | 37      | 6500K  | 5000   | 120        | White         | Non Dimmable |

## Line Drawing



## Polar Curve



## Colour



White

## Feature & Benefits

- Colour switchable between 3000K, 4000K and 6500K
- IK08 rated
- -20 - +45° ambient operating temperature
- Opal polycarbonate diffuser for even light distribution
- Can be surface mounted or suspended
- Plug and play emergency, emergency self test and microwave sensing packs available
- 5 Year Warranty
- 3 year onsite warranty (registration required) \*Terms and conditions apply

## Product Specs:

|                          |             |                          |          |
|--------------------------|-------------|--------------------------|----------|
| Input Voltage            | 220~240V AC | Input Frequency          | 50/60HZ  |
| IP Rating                | IP20        | Lifetime L70 (hrs)       | 50000hrs |
| IK Rating                | IK08        | Lamp Base                | Other    |
| Width (mm)               | 61          | Length (mm)              | 1170     |
| Weight (Kg)              | 1.312       | Height (mm)              | 71       |
| Product Type             | Linears     | Operating Temp. (Min) °C | -20°C    |
| Operating Temp. (Max) °C | 45°C        |                          |          |

## Compliance & Approvals:



## Warranty:

This product has a warranty period of 5 Years. Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.