


ShieldGLAND Pro M20S

ShieldGLAND Pro M20S Brass locknut, E-Spring, earth fly lead

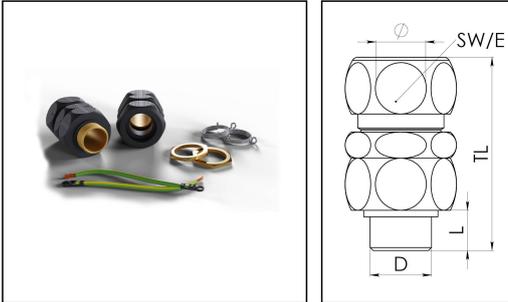

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

| | |
|---------------------------------------|----------------------|
| Material sealing gasket | TPE |
| Temp. range min | -40 °C |
| Temp. range max | 120 °C |
| Protection class | IP68 (5 bar 30 min) |
| Thread type | M |
| Ø Connection thread D | 20 |
| Lead | 1,5 |
| Length screw-in thread L | 11 mm |
| Ø cable diameter min | 7 mm |
| Ø cable diameter max | 16 mm |
| Ø cable below cable shield max | 7 mm - 11 mm |
| Key width SW | 27 mm |
| Collar diameter (E) | 30 mm |
| Total length TL | 57 mm - 63 mm |
| Type | ShieldGLAND Pro M20S |
| WISKA-Order no. | 10112394 |
| Packing unit | 2 |

Remarks:

Complete with Brass locknut, E-Spring
and earth fly lead

18.06.2024


Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

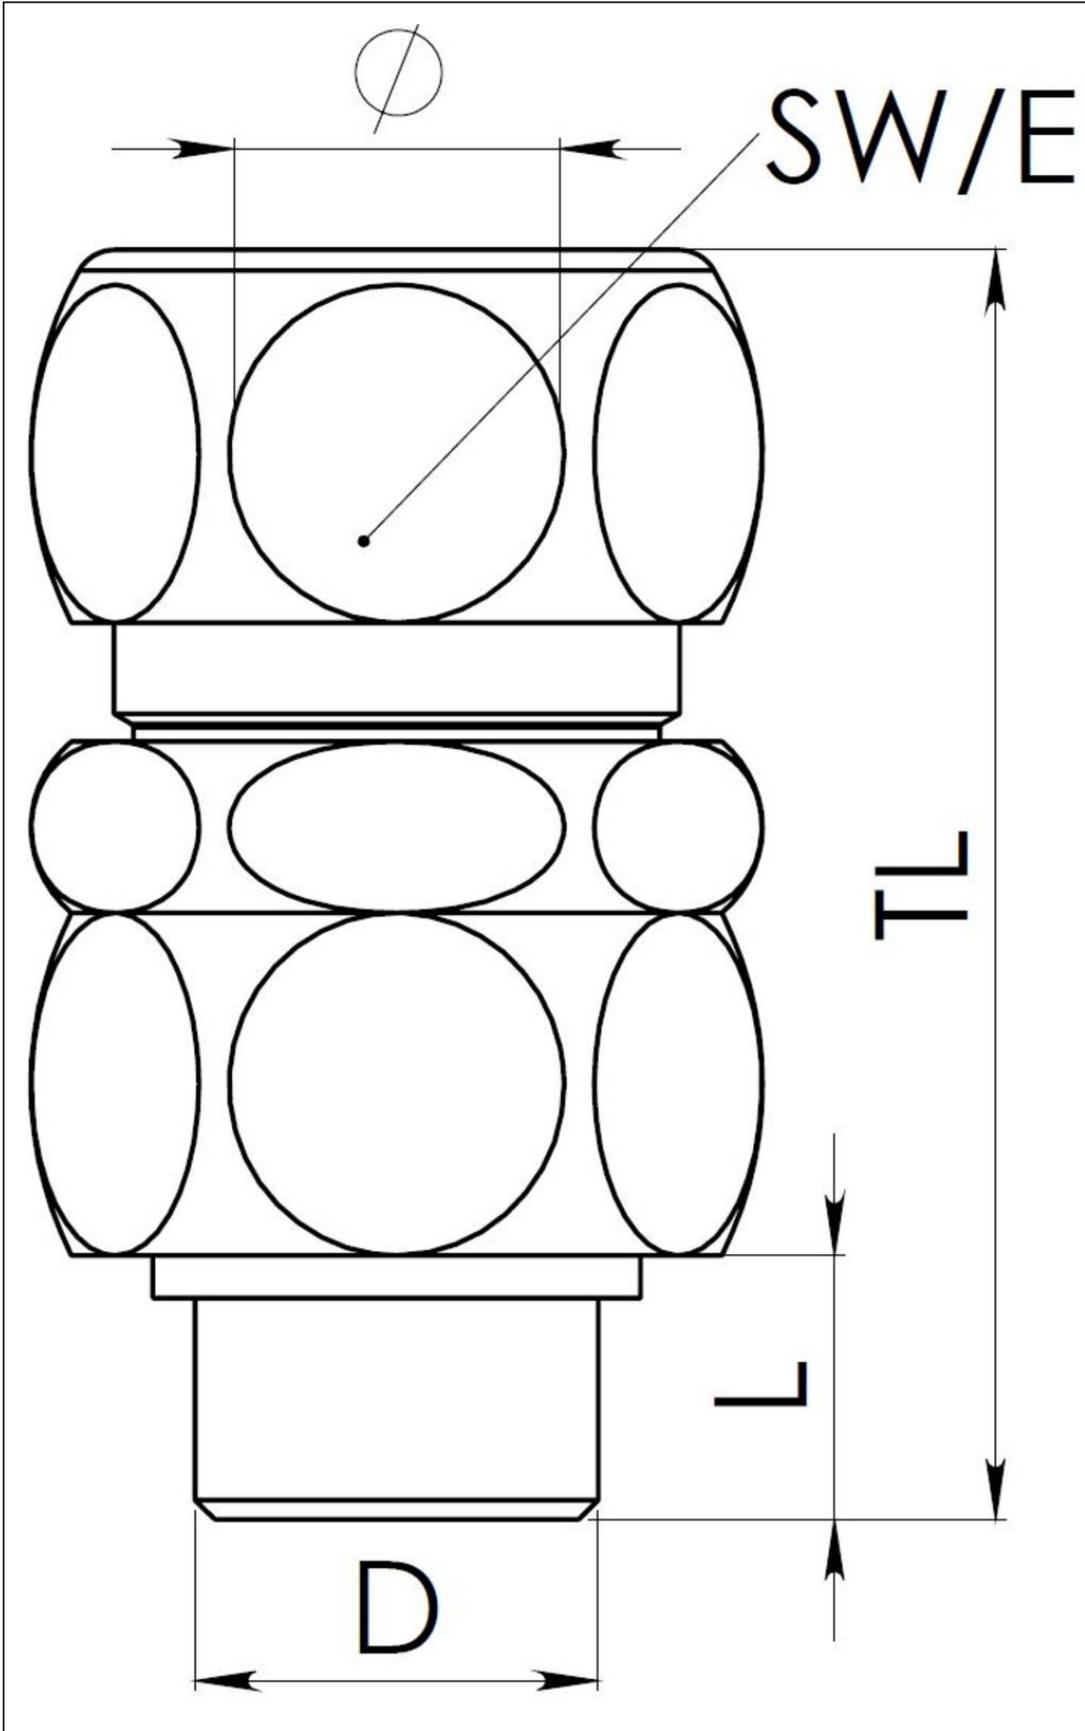

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk