




DNO Isolator

Specification Sheet

Part No: EPDNO4P

Technical Specification

| Specification | |
|---------------------------------------|------------------------------|
| Number of poles | 4P |
| Rated operational voltage Ue | 230/400V AC |
| Rated current in | 125A |
| Rated insulation voltage Ui | 1000V |
| Rated impulse withstand voltage Uimp | 4 kV |
| Utilization category | AC-22A |
| Rated frequency | 50/60Hz AC |
| Rated short-time withstand current Iq | 16KA |
| Switch type | Build-in switch-disconnector |
| Standard | IEC/EN 60947 |

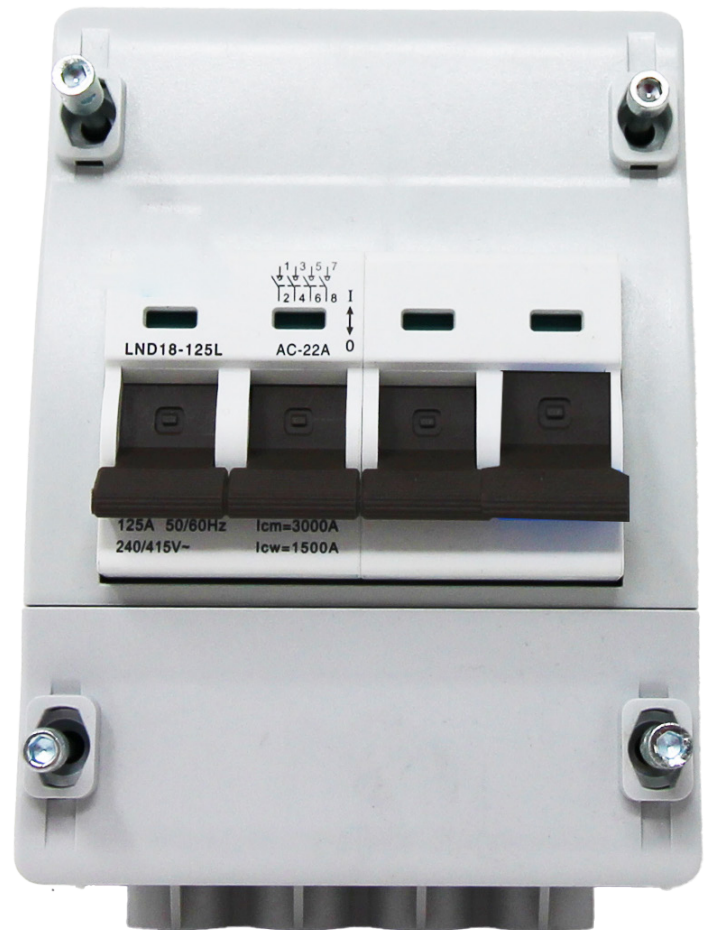

Mechanical Features

| Specification | |
|---------------------------------|--------------------------------|
| Device Height | 68mm (DIN rail acc to EN60715) |
| Device Width | 18mm/pole |
| Degree of protection | IP40 |
| Terminal capacity | 1-50mm ² |
| Terminal screw | M6 (Pozidrive PZ2) |
| Terminal torque | Max 3Nm |
| Operating temperature | -25°C ... + 55°C |
| Storage & transport temperature | -40°C ... + 70°C |
| Contact position indicator | Mechanical red/green |
| Supply Possibility | Top or Bottom |

Dimensions

