



A modern take on the traditional bollard available in two heights to suit a variety of applications, and with an indirect light source to reduce glare.

- Aluminium die-cast lamp head and extruded aluminium body, available in two heights.
- High transparency polycarbonate diffuser.
- Indirect light source offering high visual comfort and even light distribution.
- High quality LED chips and driver.
- UV protected pure polyester powder coated housing offering high corrosion resistance.
- Integrated switch to select colour temperature between 3000K and 4000K.
- RAL9005, other RAL colours available on request.



Product Specification

CODE	OPTIC	LED Qty	CCT	LUMENS	CRI	POWER	IP	IK	WEIGHT
BRE-25-80	130°	132	3000/4000	2340/2370	>70	25W	IP65	IK09	4.7
BRE-25-100	130°	132	3000/4000	2340/2370	>70	25W	IP65	IK09	5.4



General Specification

Input voltage	100-240V
Input frequency	50/60Hz
Surge protection	0.5KV
LED Chips	2835
Lifetime	L70 39,000hours L80 24,000 hours L90 11,000 hours
SDCM	SDCM<6
Class	Class I
Ambient temperature	-20°C to +50°C
Material	High pressure die-cast aluminium housing with PC cover
Finish	Polyester powder coat cured under heat
RAL colour	RAL9005

Driver Details

Product	BRE-25-80	BRE-25-100
Driver	Eaglerise	
Dimming control	/	
Driver current	600mA	600mA
Inrush current	20A MAX	20A MAX
Power factor	>0.9	>0.9

Dimensions

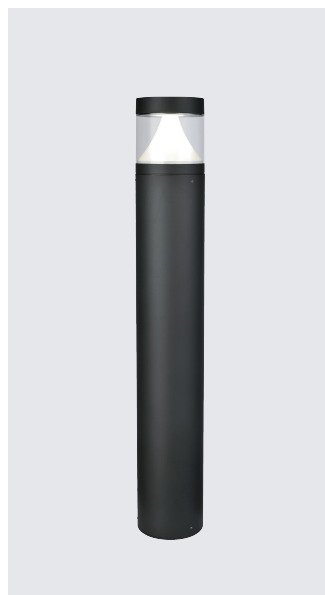

BRE