LEDSCAPE®
THE POWER OF LIGHT

ASSOS WALL LIGHT

IP65 IK08

High quality square wall light with both down only and up and down lighting options for versatility, and available in two sizes to cover a variety of applications.





- Die-cast aluminium base with extruded aluminium body.
- Super white tempered frosted glass lens offering high visual comfort.
- UV protected pure polyester powder coated housing offering high corrosion resistance.
- High quality LED chips and driver.
- Up and down and down only lighting options.
- RAL9005, other RAL colours available on request.

Optics

TP25

Product Specification

CODE	OPTIC	LED Qty	CCT	LUMENS	CRI	POWER	IP	IK	WEIGHT
ASS-S10	TP25	4	3000	990	>70	10W	IP65	IK08	1.5
ASS-S20	TP25	8	3000	2300	>70	20W	IP65	IK08	1.7
ASS-M23	TP25	9	3000	2350	>70	23W	IP65	IK08	2.7
ASS-M36	TP25	18	3000	4100	>70	36W	IP65	IK08	3.3

LEDSCAPE®
THE POWER OF LIGHT

ASSOS WALL LIGHT

General Specification

Input voltage	100-240V
Input frequency	50/60Hz
Surge protection	0.5KV
LED Chips	CREE XTE
Lifetime	L70 >65,000hours | L80 >65,000 hours | L90 >65,000 hours
SDCM	SDCM<6
Class	Class I
Ambient temperature	-20°C to +50°C
Material	High pressure die-cast aluminium housing with tempered glass
Finish	Polyester powder coat cured under heat
RAL colour	RAL9005

Driver Details

Product	**ASS-S10**	**ASS-S20**	**ASS-M23**	**ASS-M36**
Driver	Ealgerise			
Dimming control	Non Dimmable			
Driver current	700mA	700mA	700mA	600mA
Inrush current	30A MAX	20A MAX	20A MAX	20A MAX
Power factor	>0.9	>0.9	>0.9	>0.9

Dimensions



ASS-S

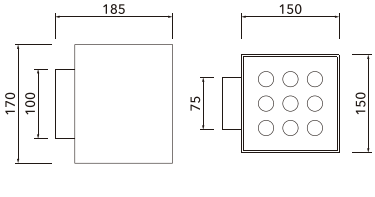

ASS-M