

## Emergency



Toolless Design



Push Fit Connector




Lithium Battery




Hinged Gear Tray

### Dimensions

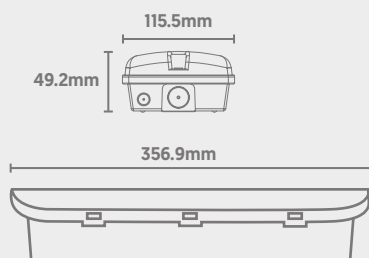

### Photometric Data

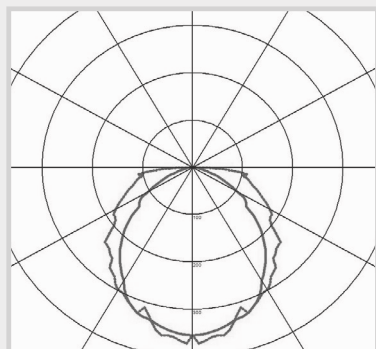

# QBrick Gen 2

## Emergency Bulkhead

CODE: QBRICK2-3H-MT

# QVIS®

LIGHTING & SECURITY



Legend  
Stickers  
Included



| Power | Output | Viewing Distance | Duration |
|-------|--------|------------------|----------|
| 1W    | 150Lm  | 20m              | 3 Hours  |

### Technical

|                                    |                                                                                                                            |
|------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Input Voltage                      | AC 220-240V                                                                                                                |
| Emergency Type                     | Maintained / Non-Maintained                                                                                                |
| IP Rating                          | IP65                                                                                                                       |
| Operating Temp.                    | -20 to +40°C                                                                                                               |
| Mains Current                      | 50mA                                                                                                                       |
| Mains Voltage Changeover Threshold | AC 140-180V                                                                                                                |
| Materials                          | Polycarbonate                                                                                                              |
| Battery Type                       | 3.2V LiFePO4; 1500mAh                                                                                                      |
| Charge Time                        | 24 Hours                                                                                                                   |
| Legend                             | ISO Man In Door (Right & Left);<br>Arrow Up, Down, Right<br>& Left                                                         |
| Dimensions                         | 356.9mm x 49.2mm x 115.5mm                                                                                                 |
| Weight                             | 0.475kg                                                                                                                    |
| MacAdam Step                       | <3                                                                                                                         |
| CE Standards                       | EN60598-1, EN 60598 2-22, EN62493,<br>EN55015, EN61547, EN61000-3-2,<br>EN61000-3-3, EN62722-1, EN62722-2-1<br>and EN50581 |
| CE Directives                      | LVD, EMC, ERP & RoHS                                                                                                       |