

Emergency LED Bulkhead 3W, wall or ceiling mounted, selectable self-test function, IP65

Technical Specification:


Primary Materials	Polycarbonate base and diffuser
Emergency Operation	Maintained or Non-Maintained, Selectable Self-test
Colour Temperature	6000K
Colour Rendering Index	Ra>80
Ingress Protection	IP65
Impact Resistance	IK08
Safety Class Rating	Class II
Operating Temperature	0°C to 50°C
LED Lifetime	30,000h L70/B50 (Ta 25°C)
Emergency Duration	3 Hours
Input Voltage & Frequency	AC220-240V 50/60Hz
Battery	LiFePO4 3.2V 1800mAh
Warranty*	5 Years




Supplied with universal legend kit: ISO Pictogram
Maximum viewing distance: 18m

Dimensions:

Bulkhead

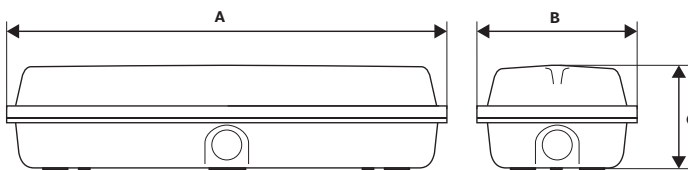

Light Distribution Curve:

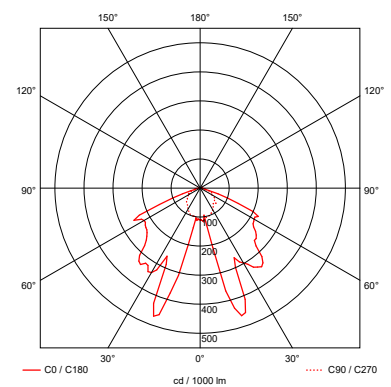

Product Range Data:

Part No.	Power	Lumen Output	Colour Temperature	Dimensions A x B x C	Viewing Distance	IP Rating	Weight
LXEBH/S	3W	150lm	6000K	350 x 110 x 60mm	18m	IP65	0.52kg

PVC ISO Pictogram & Accessories

Part No.	Description
LXEBH/RK	Recessing Kit - c/w spring clip fixings
LXEBH/LK	Universal Legend Kit - Up, Down, Left or Right direction



Replacement Battery

Part No.	Description
LXEBH/S/EBK/LI/1800	Battery Kit for LXEBH/S

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at $\pm 10\%$. The data values apply to an ambient temperature of $+25^{\circ}\text{C}$. Specification details are subject to change without prior notification. E&OE. LXEBHV3.3.25