

Emergency LED Exit Box Slim 4W, wall mounted, selectable self-test function, IP20


Technical Specification:

Primary Materials	Polycarbonate Housing, PVC legend
Emergency Operation	Maintained or Non-Maintained, Selectable Self-test
Colour Temperature	6000K
Colour Rendering Index	Ra>80
Ingress Protection	IP20
Impact Resistance	IK05
Safety Class Rating	Class II
Operating Temperature	0°C to 50°C
LED Lifetime	30,000h L70/B50 (Ta 25°C)
Emergency Duration	3 Hours
Input Voltage & Frequency	AC220-240V 50/60Hz
Battery	LiFePO4 3.2V 1800mAh
Warranty*	5 Years



Dimensions:

Exit Box Slim

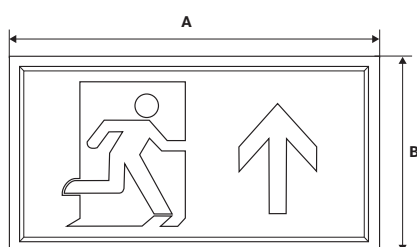


Supplied with interchangeable
'Arrow-up' legend: ISO Pictogram
Maximum viewing distance: 30m

Product Range Data:

Part No.	Power	Colour Temperature	Dimensions A x B x C	Viewing Distance	IP Rating	Weight
LXEEBS/S	4W	6000K	390 x 190 x 30mm	30m	IP20	0.74kg

PVC ISO Pictogram:

Part No.	Description
LXEEBS/L/AU	Legend Arrow Up
LXEEBS/L/AD	Legend Arrow Down
LXEEBS/L/AR	Legend Arrow Right
LXEEBS/L/AL	Legend Arrow Left



Accessories:

Part No.	Description
LXEBH/S/EBK/LI/1800	Battery Kit for LXEEBS/S

*Warranty terms and conditions apply

Product specifications and values may change due to developments and improvements in lighting technology. International standards set the tolerance in colour temperature, lumen output and connected power load at $\pm 10\%$. The data values apply to an ambient temperature of $+25^{\circ}\text{C}$. Specification details are subject to change without prior notification. E&OE. LXEEBSV3.3.25